INTERNATIONAL GAMMA-RAY ASTROPHYSICS LABORATORY

(INTEGRAL)

Science Operations Centre

Facility Operations Manual

INT-SOC-DOC-012

Issue 2

11th June 2004

Custodian :	J. Nolan	(SCI-SDG)	_____
Approved by :	L. Hansson	(SCI-SDG)	_____
Endorsed by :	C. Winkler	(SCI-SDG)	_____

Distribution List

Name	Dept.	Copy	Name	Dept.	Copy
Head ESA/RSSD/SD			**Integral Mission Manager**		
Kessler M.	SCI-SD	Y	Parmar, A	SCI-SA	Y
Integral Project Scientist					
Winkler, C	SCI-SDG	Y			
Integral SOC			**Integral MOC**		
Barr. P	SCI-SDG	Y	Schmidt, M	TOS-OGI	Y
Lock, T	TOS-QQS	Y	Southworth, R	TOS-OGI	Y
Dean, N	SCI-SDG	Y	Fahmy, S	TOS-OGI	Y
Hansson, L	SCI-SDG	Y			
Jacob, F	SCI-SDG	Y			
Kuulkers, E	SCI-SDG	Y			
Nolan, J	SCI-SDG	Y	**Integral SDC**		
Much, R	SCI-SDG	Y	Courvoisier, T. J-L	ISDC	
Orr, A	SCI-SDG	Y	Walter, R	ISDC	Y
Oosterbroek,T	SCI-SDG	Y	Mowlavi, M	ISDC	Y
Sternberg, J	SCI-SDG	Y	Texier, D	SCI-SD	Y
Treloar, J	SCI-SDG	Y			
Williams, O, R	SCI-SDG	Y			
			Inst. Operations Managers		
			de Miguel, E	OMC	Y
			La Rosa, G	IBIS	Y
			Lund, N	JEM-X	Y
			Westergaard, N.J.	JEM-X	Y
			Roques, J. P.	SPI	Y

Document Change Record			
Date	**Issue**	**Section**	**Description / Reason**
15 Dec 1999	First Draft	All	Produced to assist ISOC Software Integration & Testing.
26 May 2000	0 r1	All	Updated to reflect comments from ISOC team. Document.
14 July 2000	0 r2	All	Expanded pulling information from ISOC Ops Concept & Integral Design Report. Also includes Editorial Updates.
27 Oct 2000	0 r3	All	Updated & restructured following internal (ISOC) review
1 Nov 2000	1	-	Formal Issue for start of AO-1 Call
20 Nov 2000	1 r 1	See Change Bars	Procedures updated to reflect working experience. Some editorial corrections also made.
21 May 2002	1 r 2	All	PHS related procedures updated to bring them in line with the remodelled PHS Software. AO/TAC related activities updates to reflect 'as performed' AO 'lessons learnt' Information added to clarify ISOC ‘high level’ handling of external deliveries and more detailed handling of Event Designators.
7 Oct 2002	1 r 3	All	Procedures updated & added to reflect experience gained during Simulations & Training exercises. Procedures added to cover the reception of external deliveries and the importation of Event Designators. Concept of ISOC Science Team duty rotation included
20 Nov 2002	1 r 4	See Change Bars	Updated to reflect comments received from D. Texier & E. Kuulkers. Several other editorial corrections added.
30 Oct 2003	1 r 5	See Change Bars	Procedures for AO-2 support incorporated/updated along with several other minor procedural changes.
30 Jan 2004	1 r 6	All	Updated Post AO-2 & ISOC v10 release
11 June 2004	2	See Change Bars	Updated following internal ISOC review of v1r6.

Table of Contents

1. INTRODUCTION 1

1.1 SCOPE 1
1.2 STRUCTURE OF DOCUMENT 1
1.3 APPLICABLE DOCUMENTS 2
1.4 REFERENCE DOCUMENTS 2
1.5 LIST OF ACRONYMS 3

2. ISOC TEAM STRUCTURE & DISTRIBUTION OF TASKS 4

2.1 THE ISOC TEAM 4
2.2 DISTRIBUTION OF TASKS WITHIN THE ISOC 5
2.2.1 The ISOC Science Team 5
2.2.2 System Management and Maintenance Group 7
2.3 REGULAR MEETINGS & TELECONFERENCES 8
2.3.1 ISOC Weekly Operations Meeting 8
2.3.2 ISOC Science Planning meetings 8
2.3.3 ISOC Configuration Control Board Meetings 8
2.3.4 Bi-Weekly 'Science' Teleconference with ISDC 8
2.3.5 Bi-Weekly Ground Segment Teleconference 8
2.4 OTHER MEETINGS 9
2.4.1 Integral Science Working Group Meeting 9
2.4.2 Ground Segment Configuration Control Board Meetings 9
2.4.3 Ground Segment Co-ordination Meetings 9
2.4.4 AO Co-ordination Meetings 9
2.5 ISOC FORMAL CONTACT PERSONS/POINTS 9
2.5.1 Operational Requests & Overall Management 9
2.5.2 TOO Alerts 9
2.5.3 All other Queries 9
2.5.4 List of Email Accounts 10
2.5.5 List of Telephone points of Contact 10

3. THE ISOC SYSTEM 11

3.1 SYSTEM OVERVIEW 11
3.2 THE ISOC CORE SYSTEM 11
3.2.1 ISOC WWW System (IWS) 11
3.2.2 Proposal Generation Tool (PGT) 12
3.2.3 Proposal Handling System (PHS) 12
3.2.4 Observation Scheduling System (OSS) 13
3.2.5 Configuration Control Subsystem (CCS) 13
3.2.6 ISOC Simulations Facilities 13
3.3 ISOC ARCHIVE AND DISTRIBUTION SYSTEM 14
3.4 ISOC NETWORK CONFIGURATION 14
3.4.1 Operational Network 14
3.4.2 Development Network 14

4. OVERVIEW OF ISOC ACTIVITIES 15

4.1 SUPPORT TO THE ANNOUNCEMENT OF OPPORTUNITY (AO) PROCESS 15
4.1.1 Preparation & Maintenance of AO Documentation 15
4.1.2 Time Allocation Committee (TAC) Support 16
4.2 HELP DESK & COMMUNITY SUPPORT 17
4.2.1 The INTEGRAL Help Desk 17
4.2.2 The ISOC Science & Helpdesk Web sites 18
4.2.3 Publication of the ISOC Newsletter 18
4.3 NEW PROPOSAL SUBMISSION & PROCESSING 19
4.3.1 The Proposal Reception System 19

4.3.2 Open Time Proposals, submitted as part of the AO/TAC Process ... 19
4.3.3 Core Programme Observations ... 21
4.3.4 Submission of Calibration proposals/Observations ... 21
4.3.5 Submission of Engineering Proposals/Observations ... 22
4.4 TOO Submission & Declaration ... 23
4.4.1 Submission of ToO Proposals, outside of AO/TAC & CP ... 23
4.4.2 Declaration of a ToO ... 23
4.5 Proposal Maintenance ... 25
4.5.1 Amalgamation of Open Time Observations ... 25
4.5.2 Sending of Proposal & Observation Related Data to ISDC ... 25
4.5.3 Modification of an Open Time Proposal, outside of the AO period ... 25
4.5.4 Modification of the Core Programme ... 25
4.5.5 Updating of Calibration & Engineering Observations ... 26
4.6 Observation Scheduling ... 27
4.6.1 Long Term & Short Term Plan ... 27
4.6.2 The Nominal Planning Process @ ISOC ... 27
4.6.3 Re-planning ... 29
4.7 Observation Tracking ... 29
4.7.1 Reception of Planning Messages ... 29
4.7.2 Reception & Validation of Timeline Summary ... 30
4.8 Exposure & Observation Completion Status management ... 30
4.9 ISOC Configuration Control & Software Maintenance ... 31
4.10 Integral Science Data Archive ... 31

5. ISOC (INTERNAL) PROCEDURES ... 32

5.1 Proposal Handling & Community Support ... 32
5.1.1 Help Desk ... 32
5.1.2 AO Related Procedures ... 33
5.1.3 Core Programme Submission ... 43
5.1.4 Calibration & Engineering Proposal Submission ... 43
5.1.5 Observation Amalgamation ... 43
5.1.6 OMC Delta Catalogue Maintenance ... 44
5.2 Observation Scheduling ... 46
5.2.1 Routine Planning Activities ... 46
5.2.2 Target of Opportunity Scheduling ... 51
5.2.3 Soft TOO Scheduling ... 52
5.2.4 Visual Checks on Generated Planning files ... 53
5.2.5 Checking the Planning Messages ... 53
5.2.6 Reception & Validation of Timeline Summary ... 54
5.2.7 Handing of Contingencies ... 55
5.2.8 Special Observation Related Procedures ... 56
5.3 Observation Status Monitoring ... 61
5.3.1 Check for reception of new ECS files ... 61
5.3.2 Processing ECS files ... 61
5.3.3 Generation & sending of OCS files ... 61
5.3.4 Preparation for ISOC-ISDC Teleconference ... 61
5.4 Science Data Archive Management ... 62
5.5 ISOC System Administration & Librarian Tasks ... 63
5.5.1 ISOC Librarian Tasks ... 64
5.5.2 ISOC System Administration ... 67
5.6 Instrument Mode & Event Designator Management ... 69
5.6.1 Installation of the new Event Designators ... 69
5.6.2 Mode & ED Definition & (Re-) configuration ... 74
5.6.3 Investigation into Problems with IODB/EDs! ... 76
5.6.4 JEMX Specific Event Designator Activities ... 78

6. EXTERNAL INTERFACES ... 81

6.1 MISSION OPERATIONS CENTRE 81
6.2 INTEGRAL SCIENCE DATA CENTRE 81
6.3 SOUTHAMPTON UNIVERSITY 81
6.4 INSTRUMENT TEAMS 81
6.5 THE SCIENCE COMMUNITY 81

7. ANNEXES: 82

7.1 NEW SOURCE NAMING CONVENTION 82
7.2 DATA RELEASE GUIDELINES 82
7.3 PROJECT SCIENTIST GUIDELINES FOR ISOC MISSION PLANNING 82
7.4 BASELINE IBIS CONFIGURATIONS FOR USE WITH DIFFERENT TM ALLOCATIONS 83
7.5 OMC FFC/DCC LIST OF PREFERRED ATTITUDES 85

List of Figures

Figure 2-1 Integral Science Operations Team Structure....4
Figure 3-1 High level Schematic of the ISOC System....12
Figure 4-1 The Integral Help Desk....17
Figure 4-2 Proposal Reception & Validation....20

List of Tables

Table 1 - Distribution of Procedures....6
Table 2 - ISOC Weekly Operations Meeting Agenda....8
Table 3 - List of Formal ISOC Email Addresses....10
Table 4 - List of Key ISOC Telephone Numbers....10
Table 5 - Agreed Allocation of AO Numbers....33
Table 6 - Mail Boxes used by "isocprop" account....34
Table 7 – Example of Technical Feasibility Assessment Form....35
Table 8 - AO-1 TAC Panel Results Form....36
Table 9 - Location of Proposals on the CD....38
Table 10 - Commands to Sort AO- 3 Science Justifications....40
Table 11 - Definition of parameters in "justsplit" script....40
Table 12 - Commands to Sort AO-2 Science Justifications....41
Table 13 - Nominal ED Sequence of OMC FFC & DCC....56
Table 14 - List of Flight Dynamics deliveries....64
Table 15 - Other MOC Deliveries....65
Table 16 - List of OMC Software & Data File deliveries....66
Table 17 - List of expected JEMX related ED differences....72
Table 18 - List of necessary JEMX ED Updates....72
Table 19 - ED used, in PGT & OSS, whose characteristics are not taken from CCS....75
Table 20 - CCS Domain Properties optimised for JEMX 1 or 2....79
Table 21 - JEMX 1 & 2 TM Allocation (ISOC CCS defaults)....79
Table 22 - IBIS Config. for Normal Observations/TM....83
Table 23 - IBIS Config. for GPS & GCDE Observations....84
Table 24 - IBIS Config. for Reduced TM Allocation....84
Table 25 - List of Preferred OMC FFC pointings....85

1. Introduction

1.1 Scope

This ISOC Facility Operations Manual (IFOM) has been produced in order to provide a single source of reference for all rules, protocols and procedures to be used by the Integral SOC Staff, from the 'initial' pre-launch AO Call (Launch –18 months) until the end of the mission.

1.2 Structure of Document

The layout of this document is:

Chapter 1 - Introduction

This section includes the scope & structure of the document, along with the lists of Applicable Documents (AD), Reference Documents (RD) and Acronyms.

Chapter 2 - ISOC Team Structure

Within this section ISOC management & team structure is presented along with the breakdown of ISOC tasks between the various ISOC groups.

Chapter 3 - The ISOC System

A brief description of the ISOC System and its environment are provided in this chapter.

Chapter 4 - Overview of ISOC Activities

Detailed description of all activities performed by the ISOC.

Chapter 5 - ISOC (Internal) Procedures

This section contains the low level /detailed procedures on how the ISOC conduct/perform its day-to-day tasks.

Chapter 6 - External Interfaces

This section provides an overview of the nature of the various external groups/centres to which the ISOC interact.

Annexes:

These provide, a brief summary of the various guidelines & policy documents, details of the default IBIS configuration, for different TM allocations and a list of the recommended OMC FFC pointings

1.3 Applicable Documents

AD.1	Integral Science Management Plan	ESA/SPC (94) 1 rev 1 (Annex)
AD.2	Integral Ground Segment Management Plan	INT-PL-23045
AD.3	Science Ground Segment Requirements Document	INT-SR-1594
AD.4	Science Ground Segment Implementation Plan	INT-PL-3197
AD.5	Integral Science Data Rights	INT-TN-14571
AD.6	Integral FOP Volume 3 (OGS-SGS Interactions)	INT-MOC-FOP-1001-TOS-OGI
AD.7	ISOC-ISDC Interactions Document	INT-SOC-DOC-007

1.4 Reference Documents

RD.1	Integral SOC Operations Concept	INT-SOC-DOC-001
RD.2	Definition of Science Observation Terms	INT-SOC-DOC-002
RD.3	ISOC URD	INT-SOC-REQ-001
RD.4	ISOC SRD	INT-SOC-SRD-002
RD.5	Integral SOC System Design & Performance Report	INT/SAG/98-0045/TN
RD.6	Integral Mission Operations Concept	INT-SYS-MIS-TN-0001-SMD
RD.7	Integral Mission Planning Concept	INT-SYS-MIS-TN-0002-SMD
RD.8	ISDC Operations Management Plan	ISDC/OMP
RD.9	Integral Ground Segment Design Report	INT-RP-22519
RD.10	OGS-SGS ICD	INT-SYS-ICD-0001-OGI
RD.11	ISOC-ISDC ICD	INT-SOC-ICD-001
RD.12	ISOC-OMC ICD	INT-SOC-ICD-002
RD.13	ISDC EID-A	EID-A for ISDC
RD.14	EID-B ISDC	ICD/EIDB
RD.15	Instrument EID-A	EID Part A
RD.16	EID-B SPI	SPI-SG-0/SAT-1111-CNES
RD.17	EID-B IBIS	IN.IB.IAS.EID.001/00
RD.18	EID-B JEM-X	JEMX/EID-B
RD.19	EID-B OMC	OMC/INT/20000/ICD/001
RD.20	Configuration Control Concept for the Integral Ground Segment	INT/SAG/00-0042/TN
RD.21	Data Distribution Policy	INT/SGS/96-0027/TN
RD.22	Integral Core Programme	INT-TN-22523
RD.23	Integral Community Support	INT/SAG/99-0002/TN
RD.24	Instrument Team - Ground Segment Delivery Document	INT-SOC-ICD-034
RD.25	ISOC Configuration Control Procedures	INT-SOC-DOC-008
RD.26	ISOC Uplink SUM	INT-SOC-SUM-030
RD.27	The Integral Help Desk	INT/SAG/00-0112/TN
RD.28	Target Visibility User Manual	INT-SOC-UM-031
RD.29	Observation Time Estimator User Manual	INT-SOC-UM-032
RD.30	Overview of PV & In-flight Calibration Plan	INT/SAG/01-0158/TN
RD.31	Project Scientists Guidelines for ISOC Mission Planning	INT/SDG/02-0164/TN
RD.32	Archive Software Joint Development Plan	INT/SAG/99-0013/TN
RD.33	Instrument Modes & Modes Transitions	INT/SAG/98-0042/TN
RD.34	Instrument Team / Ground Segment Interface Document	INT-SOC-ICD-034
RD.35	The Galactic Centre Deep Exposure (AO-2)	INT-SOC-TN-041

1.5 List of Acronyms

ADS	Archive & Distribution System
AO	Announcement of Opportunity
CCB	Configuration Control Board (ISOC)
CCS	Configuration Control System
CPWG	Core programme Working Group
DCOM	Data Centre Operation Manager (ISDC Operations Manager)
DBOB	Database of Observable Bins
DRB	Delivery Review Board
ECS	Exposure Completion Status
EPOS	Enhanced POS
fte	Full Time Equivalent
GCDE	Galactic Centre Radian Deep Exposure
GPS	Galactic Plane Scan
GRB	Gamma Ray Burst
ICD	Interface Control Document
I/F	Interface
IGSCCB	INTEGRAL Ground Segment Configuration Control Board
INTEGRAL	International Gamma Ray Astrophysics Laboratory
IPV	Instrument Parameter Validator
ISDC	INTEGRAL Science Data Centre
ISOC	INTEGRAL Science Operations Centre
ISWT	Integral Science Working Team
IWS	ISOC Web System
MOC	Mission Operations Centre (ESOC)
MPMF	Mission Planning Message Files
OCS	Observation Completion Status
OGS	Operational Ground Segment (MOC & Ground Stations)
OSS	Observation Scheduler System (ISOC Planning System)
OTE	Observation Time Estimator
PAD	Proposal Administrative Data
PCWG	Payload Calibration Working Group
PGT	Proposal Generation Tool
PHS	Proposal Handling System
POD	Planning & Observation Data
POS	Preferred Observation Sequence
PSF	Planning Skeleton File
R-Sci	(ISWT nominated) CP Research Scientist
SCOM	SCience Operations Manager (ISOC Operations Manager)
IFOM	Integral SOC Facility Operations Manual (This Document)
SGS	Science Ground Segment (ISOC & ISDC)
SGSM	Science Ground Segment Manager
SOM	Spacecraft Operations Manager
SPACON	Spacecraft Controller (@ESOC)
STP	Slew Time Predictor
S/W	Software
TAC	Time Allocation Committee
TBC	To Be Confirmed
TBD	To Be Determined
TBW	To be Written
TSF	Timeline Summary
TN	Technical Note
TOO	Target Of Opportunity
TVP	Target Visibility Predictor

2. ISOC Team Structure & Distribution of Tasks

Within the ISOC, all activities are conducted under the guidance of the Integral Project Scientist. The Project Scientist being responsible for ensuring that the Integral SGS endeavours to achieve the scientific objectives as laid down in the Science Management Plan (AD.1). The Project Scientist delegates the day-to-day operations of the ISOC to the Integral Science Operations Manager (SCOM).

The SCOM, in conjunction with the MOC appointed Spacecraft Operations Manager (SOM) and the ISDC appointed Data Centre Operations Manager (DCOM), ensures that operations of the Integral mission are conducted in-line with the scientific objectives, laid down in AD.1 or as amended by the Project Scientist. In addition to the task of the day-to-day management of the ISOC, the SCOM represents the ISOC on the Integral Ground Segment Configuration Control Board (IGSCCB).

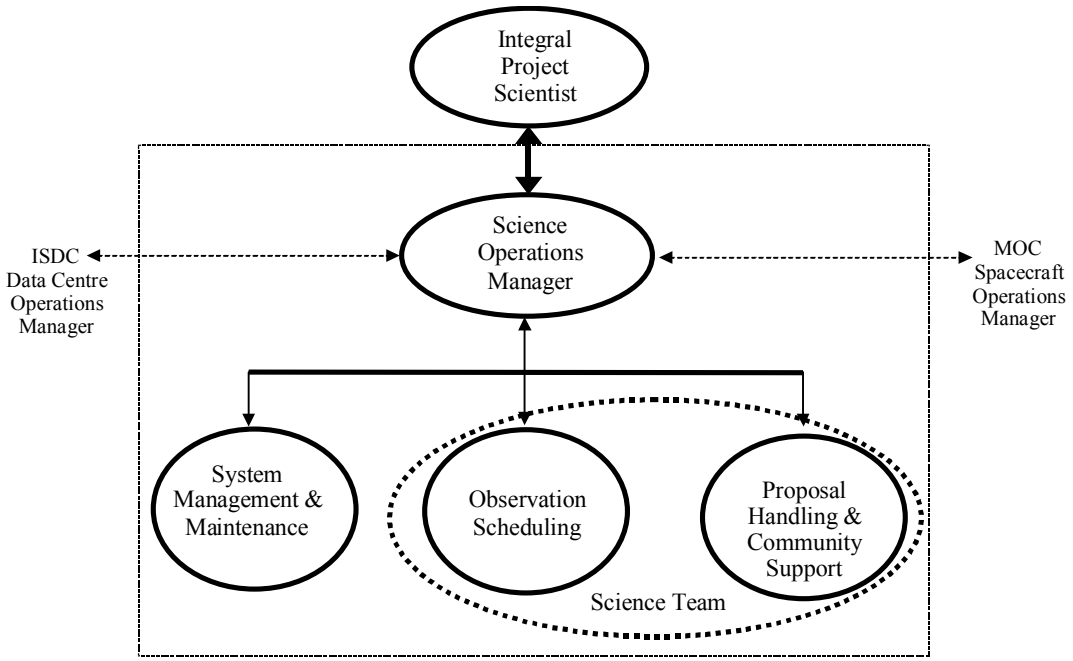

Figure 2-1 Integral Science Operations Team Structure

2.1 The ISOC Team

Within the ISOC, the Science Operation Manager (SCOM) leads a small team of experienced Scientist/Astronomers and Engineers. For conceptual reasons the team has traditionally be divided into three functional 'operational elements' or groups. The three 'functional' groups are:

- Proposal Handling & Community Support Group (PHCS)
- Observation Scheduling Group (OS)
- System Management and Maintenance Group (SMM)

In reality however there are only two physical groups, as the tasks allocated to the PHCS & OS groups are shared, between the ISOC scientists.

2.2 Distribution of Tasks within the ISOC

2.2.1 The ISOC Science Team

The ISOC Science Team consists of 5 full-time equivalents (fte) astronomers/scientist[1]. A summary of the duties & tasks assigned to the Science team is contained in sections 2.2.1.1 to 2.2.1.3. For all key tasks identified, in sections 2.2.1.1 to 2.2.1.3, the Project Scientist has nominate a member of the Science Team as the 'responsible'. For example, a different member of the team may be assigned overall responsibility for the Helpdesk Support, Instrument Calibrations, Observations Scheduling/Planning and Archive activities.

2.2.1.1 Proposal Handling & Community Support Tasks

The Tasks to be performed by the Science Team in support of Proposal Handling & Community Support are:

- Maintenance of AO related documentation
- Support to Community with respect to AO related queries
- Support to TAC with respect to AO General Programme proposals
- Support to ISWT with respect to Core Programme proposals
- Reviewing and maintenance of all accepted proposals to ensure that they remain compatible with the measured instrument performances.
- Utilisation of the Integral SOC Simulation facilities in support of:
    - proposal and TOO validation & analyse
    - analyse of instrument configured parameter modifications
    - investigations into instrument anomalies
- Supporting the submission (& scheduling) of Calibration and Engineering related proposals
- Support the definition, validation and scheduling of TOOs.
- Analyse & Import the various ISDC generated 'Exposure Completion Status' files in order to determine the execution status of all schedule exposures/observations.
- Preparation and distribution 'Observation Completion Status' files for/to ISDC.
- Regularly review the Standard Data Products release guidelines and make recommendations to the PS
- Maintenance of the Proposal Data Base and any associated data files
- Operate the ISOC Science Data Archive System

2.2.1.2 Observation Scheduling Tasks

The Tasks to be performed by the Science Team in support of Observation Scheduling are:

- Preparation of statistics / reports on the 'long term' utilisation of Integral Observation time.
- Operation of all orbit/prediction & visibility tools
- Importation, from MOC, of all operations related data/files, PSF, Planning Messages, Timeline Summary, DBOB etc.
- Using OSS create a revolution by revolution sequence of Preferred Observations (POS)
- Transferring of Preferred Observation Schedule (POS) details to MOC and ISDC
- Liaison with MOC & ISDC in all matters concerning scheduled observations

[1] The size of the Integral team will be reduced, when SOC activities are transferred from ESTEC to VILSPA.

- Support 'accelerated' re-planning in response to TOOs and Anomalies
- Liaise with other centres to conduct coordinated observations

2.2.1.3 General Support Tasks

- Support to the PS in the preparation of all necessary Proposal related reports & statistics
- Support to the PS in Public Relations Activities
- General support to proposers/observers via a Help Desk
- Maintain all appropriate 'Operational' procedures
- Liaise with Instrument Teams

Distribution of Procedures Between ISOC Team Members /Functional Tasks			
Function	Section	Title of Procedure	Comment
Mission Planner & On-call Duty Scientist	5.2.1 5.2.2 5.2.3 5.2.4 5.2.5 5.2.6 5.2.7 5.2.8	Routine Planning Activities Target of Opportunity Scheduling Soft TOO Scheduling Visual Checks on Generated Planning files Checking the Planning Messages Reception & Validation of Timeline Summary Handing of Contingencies Special Observation Related Procedures	
ISOC - ISDC Interface Scientist	5.3.1 5.3.2 5.3.3 5.3.4	Check for reception of new ECS files Processing ECS Generation & sending of OCS files Preparation for ISOC-ISDC Teleconference	ECS-OCS Handling
Routine Help Desk Support	5.1.1.1 □ 5.1.1.3	Help Desk Management Operation of the Help Desk S/W (JitterBug) Maintain & Publish a List of Frequently asked Questions	
ISOC Librarian & System Admin.	5.5.1.1 5.5.1.2 5.5.1.3 5.5.2.1 5.5.2.2 5.5.2.3 5.5.2.4	Flight Dynamics Packages IODB & ED Deliveries Deliveries from OMC Starting & Stopping of the PHS Receiver Task Status Check of the External Interface Machine Status Check of the Operational Server Monitoring of Operational Server	 AO AO
Additional Tasks & Procedures (Shared between Science Team)	5.1.2.1 5.1.2.2 5.1.2.3 5.1.2.4 5.1.2.5 5.1.2.6 5.1.3 5.1.4 5.1.5 5.1.6	Setting of the Correct AO number Monitoring of Proposal Status Proposal Analysis Proposal Updating (Post TAC Analyses) Returning a Proposal (PGT Compatible version) to a Proposer Creation of the CD with copy of Proposals for the TAC Core Programme Submission Calibration & Engineering Proposal Submission Observation Amalgamation OMC Delta Catalogue Maintenance	AO AO AO AO AO AO AO Monthly AO
Event Designator / IODB Maintenance	5.6.1 5.6.2 5.6.3 5.6.4	Installation of the new Event Designators Mode & ED Definition & (Re-) configuration Investigation into Problems with IODB/EDs! JEMX Specific Event Designator Activities	
Archive Activities	5.4	Science Data Archive Management	

Table 1 - Distribution of Procedures

2.2.1.4 On-Call Strategy

In line with AD2 & RD.9, the ISOC has implemented an 'out-of-normal-office-hours' (On-Call) support service. This service enables the ISOC team to support TOOs and Instrument Anomalies, which occur at weekends or on public holidays. The baseline, defined in RD.9, is that a member of the Science Team provides on-call cover, on Saturdays, Sundays & public holidays, during the hours of 9:00 and 17:00.

The person performing this task, rotated among the team members, is called the ISOC Duty Scientist. The nominal period of support provided by the on-call Duty Scientist runs from Monday @ 09:00 until the following Monday @09:00. The on-call Duty Scientist also 'mans' the Integral Helpdesk.

2.2.2 System Management and Maintenance Group

The SMM Group is responsible for all non-'PHCS' and OS group specific activities and for the 'first-line' maintenance of ISOC hardware & software. This group consist of 3 fte engineers[2].

2.2.2.1 Configuration Controller & System Administrator

The persons(s) occupying this position is (are) expected to carry out the following duties:

- Maintain Configuration Control of all ISOC specific documentation & configurable elements
- Maintain a cross-reference-matrix of Configured Items used by ISOC, ISDC & MOC
- Co-ordinate the maintenance/updating of Systems & Tools shared between ISOC & the other Ground Segment centres
- Import appropriate external deliveries i.e. DBOB, Revno & Orbit files etc.
- Maintain SMM Group 'Operational' procedures

2.2.2.2 Software Maintenance Engineers

The two Software Engineers are be responsible for the maintenance of the:

- Proposal Handling Software
- Observation Scheduling Software
- ISOC Archive System Software
- Simulator Facilities (running at ISOC)
- Operations related supporting software

Some PI/Instrument Team software is installed and running within the ISOC and hence the PI/Instrument Teams are required to support the ISOC in its maintenance. For example, the OMC Catalogue & it's associated extraction software. Similarly, the MOC are required to maintain the software provided by them. i.e. Visibility Tools, Slew-Time Predictor etc.

[2] The size of the Integral team will be reduced, when SOC activities are transferred from ESTEC to VILSPA

2.3 Regular Meetings & Teleconferences

2.3.1 ISOC Weekly Operations Meeting

The ISOC Weekly Operations Meeting is normally expected to take place, every Wednesday @ 10:30. The standard agenda for these meetings is outlined in Table 2. The participants of the meeting shall include representatives of all ISOC groups. The Minutes of the meeting shall be distributed to all ISOC staff, Head SCI-SD, SGS Co-ordinator.

ISOC Weekly Operations Meeting Agenda
1) Previous minutes
2) Problem Areas
3) System Status
4) Observation Status & Statistics
5) Report on any Deviations/Re-plans performed, (Outside of weekly meeting, in support of unforeseen events.)
6) Short term schedule (for next 2 – 3 weeks)
7) Longer term planning (next couple of months)
8) Archive
9) AOB

Table 2 - ISOC Weekly Operations Meeting Agenda

2.3.2 ISOC Science Planning meetings

Throughout the mission, the Project Scientist organises & chairs regular (bi-weekly or monthly) meeting of the ISOC Science team. The principle objective of these meetings is to review the status of the current schedule, with respect to the Long Term Plan (LTP), and amend the LTP accordingly. An integral element of any review of the LTP is feedback, from ISDC, on the status of the executed observations. The determination of the status of executed observations is the key purpose of the bi-weekly ISOC-ISDC telecons. (ref. Section 2.3.4.)

2.3.3 ISOC Configuration Control Board Meetings

These meetings are held as required. The SCOM or his nominated deputy shall chair this meeting, which is attended by representatives of ISOC groups. The objective of the meeting is to monitor & control the modifications to the ISOC S/W Systems and all it's configured elements.

2.3.4 Bi-Weekly 'Science' Teleconference with ISDC

These teleconferences are held with ISDC to discuss the status of the observations and the distribution of the science data. In preparation for these meeting the ISDC generated Exposure Completion Status (ECS) files are be imported, into the ISOC system and a new set of Observation Completion Status (OCS) files are generate and dispatched to ISDC. These OCS reflect the planning, performed to-date.

2.3.5 Bi-Weekly Ground Segment Teleconference

Every 2 – 3 weeks a 3-centre teleconference (MOC, ISOC & ISDC) take place. These teleconferences are coordinated & chaired by the SGS Co-ordinator. The actual day on which the meeting takes place is not important but it is beneficial, it takes place towards the end of a week. i.e. After the weekly ISOC meeting.

2.4 Other Meetings

2.4.1 Integral Science Working Group Meeting

These meetings are held on a schedule to be defined by the Project Scientist. The SCOM, or his nominated deputy, represents the ISOC.

2.4.2 Ground Segment Configuration Control Board Meetings

These meetings are held as required. The location of the meeting is expected to alternate between the 3 centres. The Mission Manager is expected to chair these meetings.

2.4.3 Ground Segment Co-ordination Meetings

These meetings, involving the three Ground Segment Centres and the four Instrument Teams, are held approximately every 3 months. Co-ordinated & chaired by the SGS Co-ordinator they provide the main forum for monitoring & reporting on the overall mission operations. ISOC participation is expected to depend heavily on the agenda of items to be discussed.

2.4.4 AO Co-ordination Meetings

These meetings are held prior to & during each AO Call. They are chaired by the Project Scientist or his nominated scientific deputy and are be attended by all member of the ISOC Science Team. The objective of these meetings is to co-ordinate & monitor the progress of an AO call and to identify & correct potential problems

2.5 ISOC Formal Contact Persons/points

2.5.1 Operational Requests & Overall Management

The official contact point, within the ISOC for all operational matters, is the Science Operations Manager (SCOM) or his/her nominated representative. The SCOM shall be provided with a mobile phone so that he/she can be contact at anytime. Refer to Table 3 & Table 4.

2.5.2 TOO Alerts

The ISOC have established a dedicated ALERT email address (intalert@rsd.esa.int) to be used by all external parties, to notify the ISOC that they have identified a potential TOO. This email address is connected to the mobile phone SMS system in order to bring the alert to the attention of the Project Scientist, SCOM and Duty Scientist.

2.5.3 All other Queries

All non-time critical queries & question relating to Integral or submitted proposal should be routed to the Integral Help Desk. (inthelp@rssd.esa.int) These questions reviewed by the Help Desk Duty Scientist and where appropriate routed to the specific ISOC/ISDC personnel for further action.

2.5.4 List of Email Accounts

The Table 3 provides a summary of the 'formal' email accounts/aliases used within the ISOC for the various operational tasks.

Formal ISOC Email Addresses	
Email Address	**Description of Purpose**
inthelp@rssd.esa.int	Integral Help Desk
intalert@rssd.esa.int	Used to inform ISOC of a potential TOOs
isocprop@rssd.esa.int	Used by ISOC Proposal Handlers
isocsci@rssd.esa.int	Alias used contact whole ISOC Science Team
isoclib@rssd.esa.int	Use to send items/mail to ISOC Librarian & ISOC CCB Secretary
Arvind.Parmar@esa.int	Mission Manager (A. Parmar)
Christoph.Winkler@esa.int	Project Scientist (C. Winkler)
Lars.Hansson@esa.int	Science Operations Manager (L. Hansson)

Table 3 - List of Formal ISOC Email Addresses

2.5.5 List of Telephone points of Contact

The Table 4 provides a summary of the 'formal' telephone numbers used within the ISOC for the various operational tasks.

List of ISOC Telephone Numbers	
Telephone Number	**Description of Purpose**
+31 71 565 3551; 3567; 3568	Operations Room
+31 71 565 4219	Operations Room Fax machine
+31 71 565 6188	Meeting Room (Fl072) – Standard line
+31 71 565 5614	ISOC Meeting Room (Fl072) – Conference Box line
+31 71 565 3591	Project Scientist (C. Winkler)
+31 71 565 4532	Mission Manager (A. Parmar)
+31 71 565 3471	Science Operations Manager (L. Hansson)
+31 71 565 5434	ISOC Office Fax machine
+31 6 52062136	Mobile assigned to Mission Manager (A. Parmar)
+31 6 52062137	Mobile assigned to Deputy Project Scientist (tbd)
+31 6 52062138	Mobile assigned to Science Operations Manager (L. Hansson)
+31 6 52062139	***Mobile assigned to ISOC Duty Scientist (Scientist on-call)***
+31 6 53775153	Private Mobile of Project Scientist (C. Winkler)

Table 4 - List of Key ISOC Telephone Numbers

3. The ISOC System

3.1 System Overview

The ISOC system in the main supports the uplink activities but in addition, it hosts a copy of the INTEGRAL archive (mirror of the ISDC INTEGRAL archive). Consequently, the ISOC system (see RD.5) is split in two independent elements: the **ISOC core system** to support the uplink operations and the **Archive and Distribution System (ADS).**

3.2 The ISOC Core System

The **ISOC core system** consists of the following elements:

- **ISOC WWW System (IWS):** this system provides access to ISOC for the public. It allows access to the AO package and PGT, to the catalogues, access to the Proposal Public Data and handling of the Change Requests (access to the change requests is controlled by password). The astronomers are able to access the Observation Time Estimator and the Target Visibility Tool.
- **Proposal Generation Tool (PGT):** PGT can be downloaded from the WWW on the user local machine. All astronomers are required to use the PGT, to prepare and submit their proposals.
- **Proposal Handling System (PHS):** This system is running at ISOC only and used by the ISOC Proposal Handlers to mainly maintain the ISOC Mission DataBase (containing the proposals and observations data).
- **Observation Scheduling System (OSS):** This system is running at ISOC only and used by the Mission Planners to schedule observations.
- **Configuration Control Subsystem (CCS)**: This system is only running at ISOC and used by the ISOC Configuration Controller to maintain and update the ISOC Configurable Parameters.
- **ISOC Simulations Facilities**: these include the Observation Time Estimator (OTE), the Instrument Parameter Validator (IPV), Starmap and the Target Visibility Predictor (TVP). The scientific community in the preparation of their proposals have access to the OTE & the TVP.

3.2.1 ISOC WWW System (IWS)

The IWS provides the following functionality:

- on-line access to the Announcement of Opportunity documentation and information.
- access to the PGT software for download on the user local machine using FTP.
- access to the simulation tools (Target Visibility Predictor and Observation Time Estimator): the system checks the correctness and completeness of the user inputs, trigger the simulations and display back the simulations results to the user.
- access to the Change Request system: the IWS checks the correctness and completeness of the user inputs. Access to this tool is restricted by a password. The system automatically stores the submitted Change Request in the CR database at ISOC.
- query the CR data base: the system checks the correctness and completeness of the user inputs then perform the submitted query on the CR database, and display back the query results to the user.
- display the Proposal Data Public Data: the system provides access to the proposal public data. The PHS automatically updates these public data at regular interval.

3.2.2 Proposal Generation Tool (PGT)

The PGT functionality's are:

- support of the user in the preparation of the proposals via the GUI.
- checking the user entries for valid values at entry time.
- global checking at proposal level. This checks the syntax and completeness of the proposal.
- store and reload a proposal on the local disk.
- access to the TVP and OTE (tbc).
- interface with the ISOC: the PGT sends the submitted proposal to ISOC.

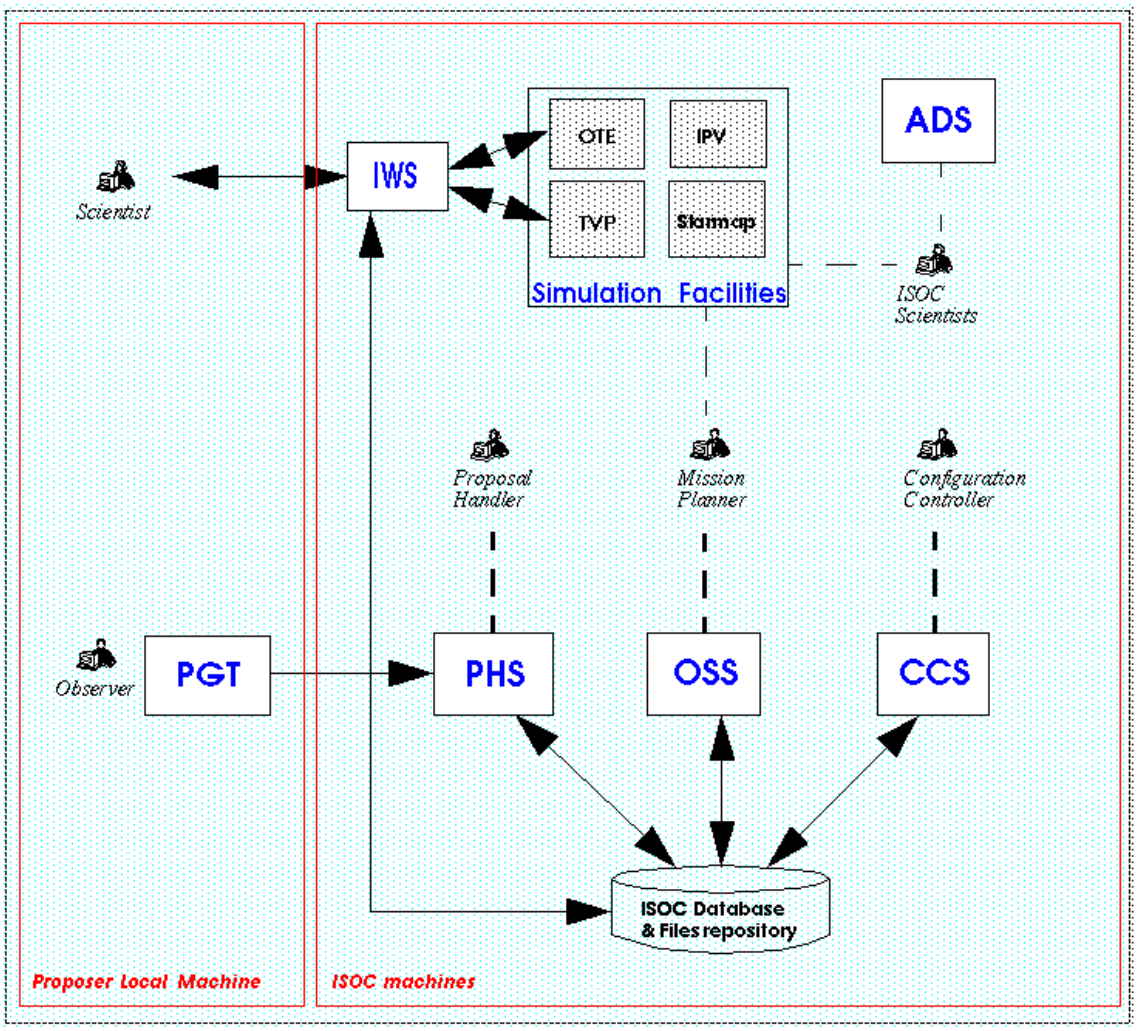

Figure 3-1 High level Schematic of the ISOC System

3.2.3 Proposal Handling System (PHS)

The PHS functionality's are:

- reception of the proposal sent by PGT. At reception, the PHS further checks the proposal. If the checks fail, the PHS stores the proposal in a dedicated directory and automatically inform by email the proposer. If the checks succeed, the PHS stores the proposal and observations in the ISOC Mission Database and further process the proposal and observations data (e.g setting the identifiers, setting the status etc...).

- processing of the Exposure Completion Status (ECS) received from the ISDC and to update the exposures data ISOC Mission data base consequently.
- generation of the Observations Completion Status (OCS) File. This involves processing the exposure data, update the observation data in the ISOC Mission Database, and write the output file (OCS).
- interface with the IFTS for getting and sending files to the external centres (MOC/ISDC)
- generation of statistics/ reports to support the operations (e.g. TAC)
- support the capability of amalgamating observations from different proposals
- generate new proposals

3.2.4 Observation Scheduling System (OSS)

The OSS functionality's are:

- interface with IFTS for sending and receiving the planning files.
- import of the PSF received from MOC into the ISOC system: this sets all the schedule constraints in the ISOC database.
- automatic scheduling of the GSHO windows and the RWB: the OSS automatically inserts GSHO windows inside the overlap windows according to a pre-defined strategy.
- automatic scheduling of the fixed time observations: the system places them in the observations windows and create the necessary exposures. The system reshuffles the GSHO and the RWB windows in order to optimise the exposure duration's and hence provide maximum utilisation of the observation time.
- extraction of the observations selected by the Mission Planner from the ISOC Mission Database.
- automatic schedule of the observations: the system reshuffles the GSHO windows and the RWB in order to maximise the observation time. The system will automatically fill-in the gaps in the schedule by finding the gaps in the schedule, scanning the ISOC Mission data base, extracting an observation, scheduling it (creating the exposures)
- calculation of the slew time between exposures using the MOC provided software generation of the planning files POS/ICP/POD
- calculation of the OMC sub-windows using the OMC provided software, definition of the pointing identifiers, generation of the EDs necessary per exposure
- display of the schedule.

3.2.5 Configuration Control Subsystem (CCS)

The CCS functionality's are:

- Importation & Maintenance of the Event Designators (ED) and associated 'Instrument/ISOC Modes/Observation Configurations
- Maintenance of the ISOC configurable parameters (Some parameters are now maintained in sub-system configuration Scripts.)
- Maintenance of the List of Proposer Identifiers

3.2.6 ISOC Simulations Facilities

3.2.6.1 Starmap

The ISOC Star-map interfaces with the DBOB (received from MOC) and the ISOC Mission Database. Star-map is used to create sky-bin plots in both equatorial and galactic co-ordinate

reference systems on to which the ISOC Mission Planners can project the co-ordinates of the observations contained within the database.

3.2.6.2 Target Visibility Predictor (TVP)

The TVP determines the visible sky-bins for a given celestial position.

3.2.6.3 Observation Time Estimator (OTE)

The OTE calculates the estimated duration of an observation given the source characteristics and the operational mode. (refer to RD.29)

3.2.6.4 Instrument Parameter Validator (IPV)

The IPV simulates the instrument behaviour in particular the telemetry rate required for a given instrument mode and parameter setting. (refer to RD.26)

3.3 ISOC Archive and Distribution System

For details of the ISOC **Archive and Distribution System (ADS),** refer to RD.32.

3.4 ISOC Network Configuration

During the operations the ISOC communicate with ISDC and the MOC via Internet. The MOC system IFTS is installed at the three centres. All the files transfer between the ISOC on one hand and MOC/ISDC on the other hand is via IFTS (based on TCP/IP and FTP). Some other file transferred via FTP (e.g. OBSW). The ISOC have two internal networks:

3.4.1 Operational Network

This network hosts the machines to run the critical operational parts of the ISOC system. One machine is used by a Mission Planner to access the Observation Scheduling System (OSS). Another is used by a Proposal Handler to access the Proposal Handling System (PHS). The third machine is used by the Configuration Controller to access the Configuration Control System in order to update the ISOC Configurable Parameters. This third machine also acts as backup to the nominal PHS & OSS machines.

All the machines on the operational network, and the network itself, are installed in a dedicated & secure area. A mechanism exist to allow authorised users the capability of transferring / copying files from the Ops system to a dedicated location on the development network.

3.4.2 Development Network

This network hosts the machines used as office and development machines. The machines where IFTS, PHS receiver and IWS are installed is accessible from the outside world. The IFTS is used for the file transfer with MOC and ISDC. Some other transfer are made using FTP. Local copies of the OSS with the ISOC Mission database are installed on one of the scientist machines. This is used by the Mission Planner to work on the Long Term Plan, in order to establish the long term planning strategy and by all Sci Team members to test new software releases.

All other software packages are installed on the server. The access to software and data is controlled using user accounts, access rights, groups of the UNIX Operating System and user accounts and protections in Oracle. (See RD.5)

4. Overview of ISOC Activities

4.1 Support to the Announcement of Opportunity (AO) Process

4.1.1 Preparation & Maintenance of AO Documentation

The ISOC is responsible for the production and maintenance of all documentation associated with the Announcement of Opportunity (AO). The AO documentation contains a detailed description of all information, required by an observer and is updated prior to each AO call.

The AO documentation is prepared by the ISOC Science team, based on inputs received from all INTEGRAL parties (Instrument teams, Mission Scientists, ISDC, MOC, Integral Project Team and the ISOC). Prior to each release of the documentation, all parties are required to participate in its review. The latest version of the documentation is available to the public via the Integral SOC Web site. http://www.rssd.esa.int/Integral/isoc/html/

The five main elements of the AO documentation are:

- Executive Summary (AO-1 only)
- Integral Manual
- Integral Guaranteed Time
- Instrument Observers Manuals
- Policies, Procedures & Forms

4.1.1.1 Executive Summary

This gives a short summary of the spacecraft and instrument capabilities, the core programme and general programme information (i.e. amount of available time), the proposal submission process, the time allocation process, data rights and a short overview of the call documentation.

4.1.1.2 INTEGRAL Manual

This document gives the overview of the mission aspects of INTEGRAL (orbit, viewing constraints, pointing etc.), and gives detailed information on the INTEGRAL ground segment, including proposal submission, proposal handling, mission planning, observation execution and changes in the schedule, TOO handling, calibration and data processing. Details on the different source types for INTEGRAL (e.g. transients, TOOs etc.) should be given, as well as all special observing modes available to the observer (dithering possibilities, fixed time observations, etc.).

4.1.1.3 INTEGRAL Guaranteed Time

This document gives a detailed description of the guaranteed time programme on INTEGRAL. Including the GPS, GCDE, and pointed observations, including TOO follow-up observations. It includes clear scientific goals of all parts of the GT, in order to allow observers to propose pointed observations on targets that may be in the GPS or GCDE. The document should give enough information for the observer and the TAC to decide whether open time observations are duplicating the GT or not.

4.1.1.4 Instrument Observer Manual's

For each of the four instruments this document describes in detail the instruments design, operations, observing modes, and data products that are sent out to the observer. Each manual contains details on the instrument performance and a description how the observer can do a rough estimate of an observing time (without using the simulator). In addition, a detailed example of an observing time estimate should be given in each manual.

4.1.1.5 Policies, Procedures and Forms

This document gives detailed information on the proposal sub-mission procedure, the types of proposals, TOO proposals, Proposal evaluation and selection (TAC), possible modifications to observations, future calls for proposals, data processing and products, data rights. It should give examples of filled in proposal forms.

4.1.2 Time Allocation Committee (TAC) Support

Refer to section 5.1.2.

4.2 Help Desk & Community Support

4.2.1 The INTEGRAL Help Desk

The purpose of the INTEGRAL help desk is to answer questions from observers on INTEGRAL (proposals, scheduling, data etc.) with a short turn around time. The target time between receiving a question and answering /responding to it being a few working days. Most queries received are minor and hence are answered on a much shorter time scale. In order to make logging of questions and answers possible the helpdesk only respond to questions submitted **electronically**.

The central helpdesk account for INTEGRAL, inthelp@rssd.esa.int, has been implemented by ISOC. Therefore, although the INTEGRAL Science Ground Segment is split between two sites (ISOC and ISDC), this is kept transparent to the observer. An observer therefore sees only one helpdesk.

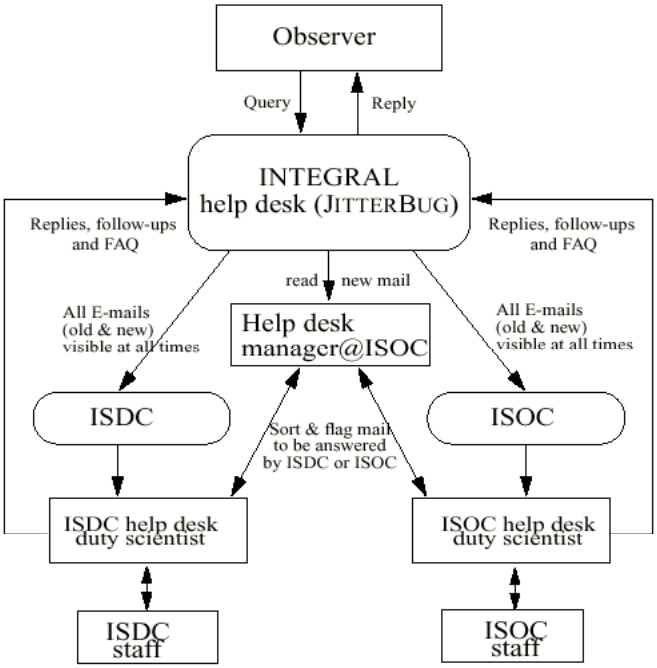

Figure 4-1 The Integral Help Desk

All submitted queries are distributed/available to both ISOC & ISDC helpdesk staff. The Help Desk Manager, at ISOC, co-ordinates the responses. The ISDC team answer questions on INTEGRAL data product's instrument calibration results and data shipment. The ISOC team answer questions on Proposals, observing modes, observation scheduling and general INTEGRAL questions.

The incoming Emails are logged, and each query received is assigned a reference number. The person making the query is automatically notified of the number assigned. In all future correspondence the person who made the original query must quote this reference number. The

answers that are sent back, from the ISOC or ISDC, to the observers are also logged and tracked using this reference number

4.2.2 The ISOC Science & Helpdesk Web sites

The ISOC maintain a web site dedicated to providing details of the Integral mission and its operations status.

4.2.3 Publication of the ISOC Newsletter

The Integral Science Operations Centre newsletter is an important medium to inform the community of news concerning INTEGRAL proposals, scheduling, data processing, calibration and science. The newsletter is available in electronic (PDF) format from the ISOC External Web page http://www.rssd.esa.int/Integral/isoc/html/. Registered users/proposers are notified by email when a new or updated Newsletter is available on the web.

4.3 New Proposal Submission & Processing

4.3.1 The Proposal Reception System

Proposals can only be submitted to the ISOC when the Proposal Receiver S/W is enabled. At the start of each AO, or beginning of any period of the approved (re-) submission, the ISOC Start/ Enable the Proposal Receiver S/W. This S/W then remains "Enabled" until the end of the AO submission period. The period during which the Receiver is enabled is identified in the AO data package.

4.3.2 Open Time Proposals, submitted as part of the AO/TAC Process

The vast majority of proposal requests, for Integral Observing Time, come in response to the Announcements of Opportunities (AO) to be made prior to and during the mission. A brief overview of how such proposals are handled by the ISOC is given below.

4.3.2.1 The Submission of an Open Time Proposal, as part of an AO

Before submitting a proposal a Proposer must first download and install the ISOC PGT software. This S/W is available from the ISOC Operational Web site. The proposer is then free to create his/her proposals. Before submitting the proposal, the proposer should attach his/her Scientific Justification in the format identified in the AO documentation. On a rare occasion, and only after approval from the Help Desk, a science justification may be submitted via ftp.

On reception of a proposal, the ISOC Proposal Handling System (PHS) checks its validity against several predefined criteria and:

If no errors are detected:

- The proposal is flagged as VALIDATED and placed in the Proposal Database with its status set to VALIDATED.
- An automatic task sends an Email to the Proposer advising him/her that the proposal has been successfully received & validated. The Email also contains the automatically generated Proposal ID assigned to this proposal. This Proposal ID must be quoted in all future communications with the ISOC Help Desk, regarding this Proposal.
- A copy of the Email is sent to a special ISOC Proposal Handler account (isocprop@rssd.esa.int) for internal ISOC records.

If found in error:

- The proposal is placed in the INVALID Proposals Directory within the PHS.
- An automatic task sends the proposal back to the Proposer indicating that the proposal failed the validation process. The Email contains details of the error(s) detected.
- A copy of the Email is sent to the special Proposal Handler account for internal ISOC records.

4.3.2.2 The Re-Submission of an Open Time Proposal, during the AO

At any time during the AO Call an observer is free to resubmit an already Validated Proposal. The procedure for re-submission is basically the same as for the first time submission, with the only additional constraint, on the proposer, being that (s)he is required to use the "ReSUBMIT" option.

Any successfully validated re-submitted proposal is stored in the database with a new/high version number. On the other hand, PHS treats, as a new proposal, any re-submitted proposal that does not containing a valid Proposal ID. If successfully validated, it results in a new proposal in the database with a new Proposal ID.

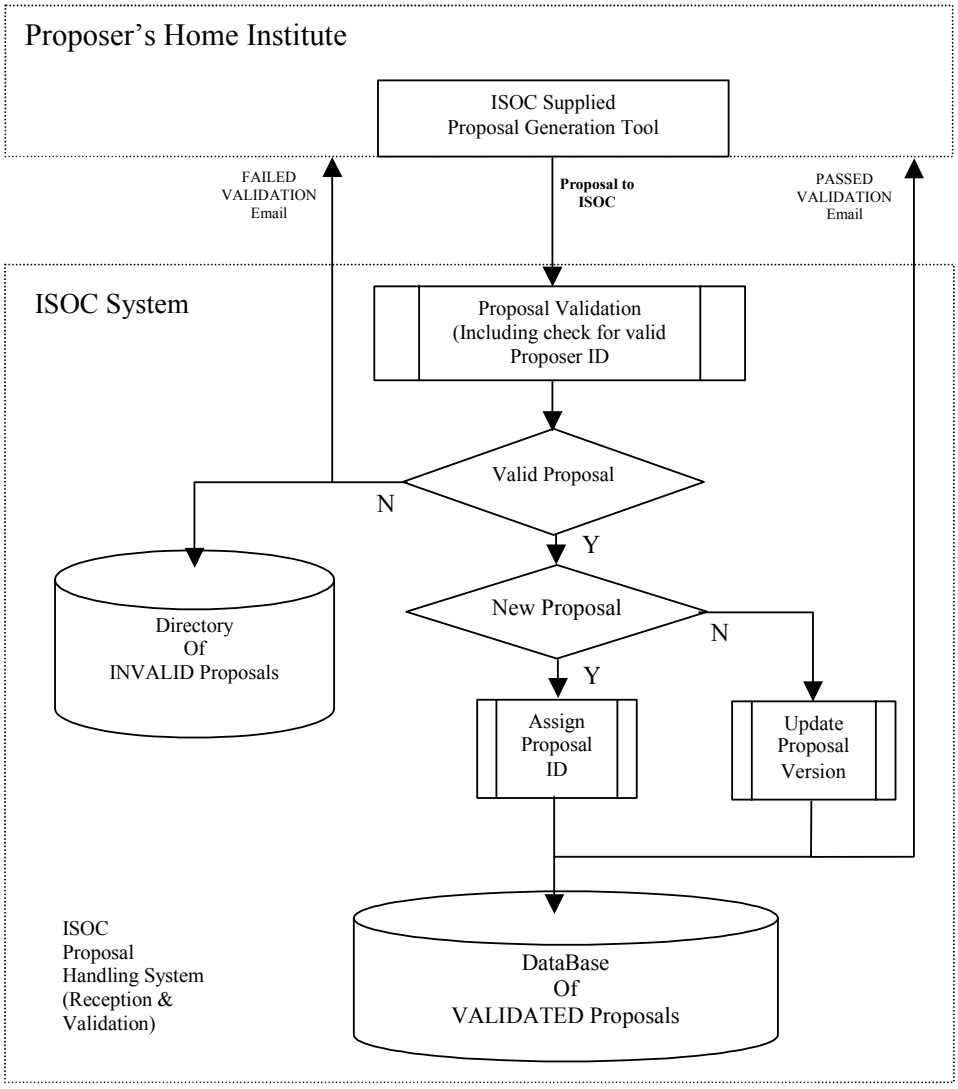

Figure 4-2 Proposal Reception & Validation

4.3.2.3 Processing of Validated Proposals, by ISOC, prior to TAC Analysis

Once the period of an AO Call has elapsed, and the PHS Receiver Interface has been Stopped /Disabled the ISOC Proposal Handling team have the task of analysing all Validated Proposals, before their submission to the Time Allocation Committee (TAC). To examine the proposals in the database the Proposal Handlers utilise the Proposal Handling System (PHS). Using the PHS it is possible to filter, sort and print a complete proposal and/or certain characteristics of the various observations contained within it.

Depending on the nature of the requested observations, the ISOC staff may use of the Observation Time Estimator (OTE) and the Target Visibility Prediction (TVP) Software to aide their analysis into the feasibility of a specific proposal/observation. Following the completion of the analysis of the Validated Proposal, the ISOC Proposal Handling team prepare (off line) a brief report (Technical Feasibility Assessment) on each proposal.

The ISOC team sort the Proposals into their TAC Panel subjects. The full proposal (including Scientific Justification) and the brief report, prepared by the ISOC, are then sent to the TAC.

4.3.2.4 Processing of Validated Proposals, by ISOC, post TAC Analysis

Following the completion of the TAC process, the ISOC Staff update certain (specific) fields of the Validated Proposals held within the database. The fields which the ISOC must update, post TAC analysis, include TAC Status (APPROVED/REJECTED); TAC assigned Priority; Allocated Duration…. etc.

4.3.3 Core Programme Observations

Prior to each AO, the ISOC enter the characteristics of all Core Programme observations, in line with instructions received from the Project Scientist/ISWT. The observations to be performed within the Core Programme are:

- Pointed Observations
- Galactic Plane Scans
- Galactic Centre Deep Exposure

4.3.3.1 Submission of Pointed Observations

The procedure for the submission of the Pointed Observations is identical to that used to submit Open Time Proposals. The only real differences are that the ISOC Sci Team will use PHS to submit the proposals/observations. The ISOC Proposal Handlers set the "APPROVED" flag, in the Proposal Database, after the Project Scientist has cross-checked what has been entered.

4.3.3.2 Submission of GPS

On a yearly basis the ISOC team, using a dedicated set of Tools/Software Scripts, enter into the PHS all the observation required to perform the weekly GPS scans.

4.3.3.3 Submission of GCDE

On a yearly basis the ISOC team, using a dedicated set of Tools/Software Scripts, enter into the PHS all the observation required to perform the GCDE scans.

4.3.4 Submission of Calibration proposals/Observations

In order to be scheduled by the ISOC, Instrument Calibrations have to exist within the ISOC Proposal / Observation databases. All post launch instrument calibration requests/proposals are entered directly into the ISOC database, using the PHS system.

Submission of a calibration proposal / observation is performed by the ISOC Science team, using the PHS, in response to a request from a specific Instrument Team.

4.3.5 Submission of Engineering Proposals/Observations

Technically speaking, the ISOC planning system cannot be used to perform 'engineering' activities such as SPI Annealing, instrument memory loading etc. It has however been recognised that to perform these type of activities, system resources such as TM Allocation and special satellite attitudes etc., along with the ability to reserve (block) a period of instrument 'observing' time is required.

Submission of engineering observation is performed in-house by the ISOC Science Team in response to requests received from, & approved by, the Ground Segment Co-ordination meetings 2.4.3.

4.4 TOO Submission & Declaration

4.4.1 Submission of ToO Proposals, outside of AO/TAC & CP

Although it is expected that most 'potential' Target of Opportunity (ToO) proposals is received and approved as part of the CP & AO process, it is expected that some additional proposals are submitted, during the course of the mission, in response to observed transients. At any time, throughout the mission, therefore the ISOC may receive a request to interrupt the nominal planned sequence of observation and schedule a ToO.

The mechanism for the submission of a ToO request is via the dedicated web page http://www.rssd.esa.int/Integral/isoc/html/too/my_too_alert.html. After entering & committing the required information, an email is sent to a dedicated email alias (intalert@rssd.esa.int). All emails generated/received are automatically forwarded to the ISOC Science Team. In addition, an SMS is sent to the ISOC Duty Scientist, advising him/her of the existence of the alert.

On reception of the request, the ISOC Duty Scientist will:

- Perform a manual check, against a predefined set of catalogues, if the RA & DEC of the source corresponds to a know 'fast transient'
- Check the feasibility of scheduling the required observation (Source visibility, S/C attitude constraints etc.)
- Assess the implications, scientific & technical, of interrupting the present 'pre-planned' schedule.
- Cross-check the request against the list of already approved proposals
- Report back to the Project Scientist on his/her findings

4.4.2 Declaration of a ToO

If the Project Scientist declares the TOO to be valid, he issues a TOO notification Email. This notification will be distributed to the ISWT and all elements in the ground segment. This notification will advise everyone that a TOO has been declared and, if necessary, a re-plan of the schedule has been approved.

The ISOC's response to the declaration of a TOO is:

1. If an already approved proposal exists in the database, the PS authorises the ISOC Planners to schedule the TOO and specifies where the ongoing schedule could be interrupted in order to insert the TOO.
   If the approved observation does not belong to the person who has notified the ISOC of the TOO, the ISOC Help Desk contacts the original proposer and advise him/her that his proposal/observation is about to be scheduled.

   Or

2. If no approved proposal exists, within the database, the ISOC Duty Scientist assist the 'New TOO proposer' to submit one. The sequence events involved in do this are:
   - ISOC Help Desk contacts proposer advising him/her that the TOO request has been authorised.
   - Using the data, provided by the proposer, the ISOC Proposal Handler then creates and submits to PHS, the new TOO proposal. (Note: In order to minimise the time required to

generate a new Proposal/observation the ISOC maintain some generic TOO templates. The proposal is assigned type 'TOO non-TAC' approved. Assuming the data has been entered correctly, the proposer of the TOO should receive, from PHS, notification that his proposal has been VALIDATED & placed in the proposal DataBase.

- Once the completed proposal has been checked, by the Project Scientist, its' status is updated to APPROVED. At the same time the ISOC Proposal handler inserts the additional 'post TAC' field values. i.e. "Approved Duration", "Priority" etc..
- With the approved proposal now in the database the ISOC Mission Planner can initiate the appropriate 're-plan' of the ongoing schedule.

The process for scheduling an observation resulting from the declaration of a TOO is addressed in sections 4.6.3 and 5.2.2.

4.5 Proposal Maintenance

4.5.1 Amalgamation of Open Time Observations

As part of the AO process the ISOC prepare for the TAC, a list of possible 'proposed' Observations that could be amalgamated. These lists, of potential amalgamated observations are forwarded to the TAC.

Details of the amalgamation requirements/rules are provided in the ISOC URD (RD.2). It is possible for the ISOC to set a flag in PHS to INHIBIT the observations from a specific proposal from being considered for amalgamation, should such a need be justified.

After taking into consideration any recommendations made by the TAC, the ISOC staff contact the PI advising them if any observation in their proposal has been recommended for amalgamation. The ISOC staff will then update the Proposal/Observation database accordingly.

4.5.2 Sending of Proposal & Observation Related Data to ISDC

Following the completion of the AO process the ISOC Science Team generate and send, to the ISDC, the Proposal Administrative Data (PAD), Initial Observation Parameters (IOP) and the TOO Justification/Trigger Criteria.

Due to the fact that Proposal/Observation Database is updated between AOs, as TOO, Calibration & Engineering Observations etc. are added/modified, the ISOC are required to send new versions of the PAD, IOP and TOO Justifications to the ISDC (RD.11).

4.5.3 Modification of an Open Time Proposal, outside of the AO period

Once the AO Call has been deemed closed, by the Project Scientist, any observer wishing to update/modify a proposal must first contact the ISOC Help Desk. The observer is required to provide his/her Proposal IDs, the details of the changes to be made along with the justification as to why the changes are necessary. Only after analysing the request, including possible consultation with the observer, the Help Desk refers the matter to the Project Scientist.

If the Project Scientist approves the request, a member of the ISOC Science team then carry out the approved modifications to the proposal and send a copy of the modified proposal back to the observer/proposer, for his/her confirmation. During the period between the requested update and the reception/acknowledgement, from/by the Proposers, indicating his acceptance of the changes implemented, the scheduling of the proposal/observation is blocked.

4.5.4 Modification of the Core Programme

The ISOC team only perform modification to the Core Programme observations at the request of the Project Scientist. Due to the nature of the implementation of the GPS & GCDE proposals/observation, within PHS, changes to their structure & observing strategies may require the support of the ISOC S/W maintenance team[3].

[3] It is foreseen that in a future version (v10.5+) of PHS that the updating of many of these observation characteristics will be possible without S/W team support.

4.5.5 Updating of Calibration & Engineering Observations

Throughout the mission, there is the need to regularly add new and modify existing Calibration & Engineering observations.

Changes to/& addition of engineering observation are performed in-house, by the ISOC team, in response to a request from MOC or the IT.

Changes to/& addition of Calibration observation are also carried out by the ISOC team but in these cases it in response to (in conjunction with) the appropriate Instrument Team(s) and ISDC. Details of the in-flight calibration concept are contained in the In-flight Calibration Plan, RD.30.

For details of the regular OMC FFC/DCC calibration, see section 5.2.8.1.

4.6 Observation Scheduling

4.6.1 Long Term & Short Term Plan

Following the completion of each AO Call and TAC processing, the ISOC Mission Planners generate a set of 'long term' plans/observing scenarios, covering observation period (Year of Mission) to which the AO relates. This set of 'Long Term Plans' is used by the Project Scientist, in consultation with the ISWT, to determine the final planning strategy to be used by the ISOC. The key elements of this strategy are summarised, by the Project Scientist, in the Mission Planning Guidelines (RD.31), provided to the ISOC planners. The overall outcome of the strategy is reflected in the long term & short term plans produced by the ISOC Science team.

Previous experience has shown that any long-term plan produced never fully reflects what will eventually be scheduled. This is especially the case where, as is the case with Integral, observation times are relatively large and hence subject to interruptions to support ToOs. The LTP can however be used to provide an accurate prediction on when /if it is possible to schedule specific (eg. Fixed Time and 'Co-ordinated') observation and to what degree there may be some over/under capacity with respect to predicted sky visibility. The LTP is published by ISOC on the web at http://www.rssd.esa.int/Integral/isoc/html/. Throughout the mission, regular meetings are held, between the Project Scientist & ISOC Science team, to review the status of the LTP and update where appropriate.

A Short Term Plan (STP), derived from the LTP, is also published by the ISOC on the WEB at http://www.rssd.esa.int/Integral/isoc/html/ This STP, which typically cover a period of up to 3 weeks in the future, is a reflection of the actual planning status. The STP is derived / extracted dynamically from the ISOC database every time a web user refreshes the screen.

4.6.2 The Nominal Planning Process @ ISOC

4.6.2.1 Importation of New PSFs

On a regular basis, at least once per week, the Mission Planner check to see if MOC have sent any new or updated Planning Skeleton Files (PSF). These files normally refer to future 'as yet unscheduled' revolutions but may, on rare occasions, such as ground station availability change, relate to a previously scheduled (but not yet executed) one. If the PSFs sent are updates to existing one the MOC normal contact the planners via email. The planners then use the Observation Scheduling System (OSS), to import these PSFs.

4.6.2.2 Selection of the Observations to be scheduled

Based on the Long Term Plan, approved by the Project Scientist, the Duty Mission Planner, using the Observation Scheduling System (OSS), select the areas of the sky (called Sky Bins) where it is possible to schedule observations. These Sky Bins being selected on user definable criteria such as:

- Sky Bin visible for greater than…
- Sky Bin visible in a specific revolution/week or month etc.

4.6.2.2.1 Identification of potential observations

Once the appropriate/available Sky Bins have been identified, the Mission Planner searchs the Proposal/Observation Database, using one or more 'user definable' sets of search criteria, for suitable /potential observations to cover the period(s) defined in the Sky Bins.

The sort/selection criteria cover things like:

- Scientific Priority,
- Observation Type (Fixed Time, Calibration etc.),
- Sky Bin Location,
- Instruments to be used,
- If part of an observation has already been observed. etc.

Normally much of this effort is not be required as the primary source for which observations are to schedule & when is the LTP.

4.6.2.2.2 GPS and GCDE observations

When it comes to scheduling the GPS & GCDE the ISOC Mission Planner check his/her records, and the LTP, to determine which scan or part of the GCDE is due to be performed. After confirming this, using Starmap, the planner selects the appropriate observation and points within it. GPS & GCDE observations are then schedule as fixed time observations.

4.6.2.2.3 Insertion of Calibration & Engineering Observations

Calibration or engineering observation are stored in the proposal database as fixed time observations and as such require no special scheduling procedures. The mission planner ensures that each observation has the correct start time, obs duration and instrument mode settings. These observations are always scheduled as Fixed-Time observations and are handles as in the normal manner.

4.6.2.2.4 Sorting of Observations

Having extracted a list of observations, the Mission Planner, has the capability of sorting them further, using their database attributes. The outcome of these sorts is displayable in both graphical and tabular format. The Mission Planner is able to print and save the results of the sorts performed.

4.6.2.3 Generation of the POS & POD

With the preferred set & sequence of observations defined, the mission planner uses the Observation Scheduling (OSS) System to merge the selected observations with the MOC provided PSFs. The OSS attempts to schedule the selected observations in order of their priority. The ISOC Mission Planner, as part of the selection process, defines these 'scheduling' priorities.

Once the draft schedules are 'complete', the mission planner is offered the opportunity to inspect them. If satisfied with the schedules, the Mission Planner commands the OSS to complete the POS making process. The OSS then generates the required number of POSs, inserting where necessary the supplementary information required.

4.6.2.4 Sending of POS & POD

"Exiting" from the OSS scheduling window forces the generation of the planning files. During the generation process, OSS inserts the OMC command parameter information. Once the files are created OSS performs an automatic check on the POS & ICP and advice if any problems are

encountered. Assuming no errors are detected the final task of the Mission Planner is to transfer the POS/ICP to the MOC and the associated POD/OPP to the ISDC.

4.6.3 Re-planning

The term re-planning is however usually associated with the need to radically change the sequence of planned operations/observations in response to a contingency. The need for such contingencies re-planning of the schedule is foreseen in cases of:

- Instrument/Spacecraft Anomaly
- Declaration of a TOO
- Unforeseen (Planned) Ground Station Outage

The details of the re-plan process are dependent on the reason the re-plan is being performed. For example, if sufficient advanced warning is available about the change in ground stations then a complete new set of planning files could be required. i.e. from PSF through to Timeline. If the re-plan has to be performed in response to a spacecraft or instrument anomaly, the on-going schedule may well have to be stopped and a new set of planning files generated once the problem has been solved.

The scheduling of a TOO related observation is only be performed by the ISOC, when explicitly authorised by the Project Scientist. As part of this instruction/declaration, the Project Scientist makes the final decision as to where the ongoing or pre-planned sequence of observations is to be interrupted and subsequently resumed.

The nominal sequence of events, associated with a re-plan is:

- Importing of new PSFs, (If requested to do so by MOC)
- De-commit the appropriate observations/exposures from the existing schedules (if PSF was not imported)
- Forces selection of new observation as part of the re-planning process
- Generation of the new Revolution(s) files
- Send new planning files to MOC & ISDC

Further details can be found in section 5.2.2.

4.7 Observation Tracking

The status of an observation can be tracked at each stage of the planning process. Prior to the execution of the schedule, it is possible, by examining the various planning messages, received from MOC, to monitor the process of Timeline generation. This stage ends with the reception, from MOC, of a Timeline Summary File (TSF), for each POS sent.
Each stage of this process is described in the following subsections.

4.7.1 Reception of Planning Messages

Following the submission of the POS & ICP, and prior to the reception of the Timeline Summary, the ISOC receive four different types of Planning Messages, from MOC, indicating the progress of the Timeline Generation.

The following message types are received, via IFTS:

- EPOS Validation Message
- APF Validation Message
- Cross Validation Message
- Timeline Generation Message

Since the header of these messages contain an indication of whether that part of the Timeline generation process has been successful or not, the ISOC Mission Planner can easily monitor the progress made by MOC in generating a Timeline.

The reception of a message indicating the failure of a specific part of the generation sequence, especially EPOS & APF generation, provide the ISOC advanced warning that MOC may reject the POS that they refer to. These Planning Messages are expected accessible on both the ISOC operational (~/isoc/data/MPMF) and office (~home/isocops/data/MPMF) networks.

4.7.2 Reception & Validation of Timeline Summary

At the end of the Timeline Generation Process the MOC send to ISOC, via IFTS, the Timeline Summary. Since the IFTS at ISOC, does not trigger any 'alarms' when a file is received the MOC also send an email to the Mission Planner and SCOM advising them of the new Timeline Summary.

These Timeline Summary files are accessible on both the ISOC operational (~/isoc/data/TSF) and office (~home/isocops/data/TSF) networks.

4.8 Exposure & Observation Completion Status management

At the beginning of each week/planning cycle, the ISOC Scientist responsible, for ECS-OCS handling, checks to see if there are any new Exposure Completions Status files, from ISDC. These files are generated by the ISDC on the consolidated data hence the 3-week delay. These ECS files provide the ISOC with the statistics it requires on the 'degree of completeness' of the executed/scheduled exposures. (AD.5)

If after analyse of the ECS files, they are have been confirmed to be consistent with what the ISOC scheduled, and the amount of 'Good Time' is deemed valid, he/she runs 'Import ECS' option available in the Proposal Handling System (PHS). By importing the ECS files from ISDC, he/she automatically forces the system to update the status of the related observations.

Towards the end of each planning week/cycle, the same scientist, using PHS, generates and sends a new set of Observation Completion Status (OCS) files. He/she reports the status of all observations at the ISOC Weekly Operations meeting and to the Project Scientist at the Science Planning meetings.

A bi-weekly telecom is held with ISDC to discuss the status of this interface and determine which observations can/should be considered as complete.

4.9 ISOC Configuration Control & Software Maintenance

The procedures & rules to be followed, to maintain the ISOC Configuration Control & Software are contained within the ISOC Configuration Control Procedures document, RD.25. As a supplement to RD.25, section 5.5 provides an overview of how ISOC handle the reception of external deliveries.

4.10 Integral Science Data Archive

Background information on the ISOC Archive can be found in the following documents:

- Archive Software Joint Development Plan (RD.31)
- ISOC-ISDC Interactions Document (AD.7)
- ISOC-ISDC ICD (RD.11)

5. ISOC (Internal) Procedures

5.1 Proposal Handling & Community Support

5.1.1 Help Desk

5.1.1.1 Help Desk Management

The helpdesk manager / duty scientist tasks can be performed using machines on the normal office-LAN. Below is a list tasks to be performed:

- Check the helpdesk account several times per day (minimum once per day) for new messages.
- Allocate questions to either ISOC or ISDC for further investigation & response.
- Check the pending questions (ISOC & ISDC) and ensure that none are older than 2 days.
- Answer ISOC allocated questions using the FAQ lists, or passes messages to appropriate ISOC specialist for action/response.
- Update FAQ list where appropriate

5.1.1.2 Operation of the Help Desk S/W (JitterBug)

The Help Desk account can be access using a WEB Browser at the ISOC, internally restricted, URL http://rssd.esa.int/inthelp_scripts/inthelp.manager. The procedures for operating the Help Desk (JitterBug) are defined in RD.27.

5.1.1.3 Maintain & Publish a List of Frequently asked Questions

The ISOC Help Desk manager/ duty scientist based on inputs from The ISOC & ISDC Science teams maintains the list of FAQ. The list is accessible from the ISOC web page and updated as needed.

5.1.2 AO Related Procedures

5.1.2.1 Setting of the Correct AO number

At the start of each AO Call, it essential the AO number used by the CCS & PHS is set to the correct value. The rationale for this being that it allows the ISOC & ISDC to differentiate between the different types of proposals using the AO number. Open Time (Per year); Core (per year); Calibration; Engineering & PV phase related. The AO number forms part (AA field) of the Proposal Identifier. See RD.11.

AO Number	Use
00	Identifies proposals submitted for the PV phase
01; 02; 03… etc	Identifies the annual AO Call for Open time proposals and the annual submitted Core Programme proposals
88	Identifies proposals submitted for Calibration & Engineering activities
99	Identifies proposals submitted for internal ISOC testing

Table 5 - Agreed Allocation of AO Numbers

At the start of each AO call, the ISOC must ensure that the AO number used by PHS/CCS matches the AO number of the PGT version, issued to support a specific AO.

1. Logon to PHS & select CCS option "Maintain Domain Properties"
2. Scroll down the list of Properties until you get to "isoc AO.x"
   (Where x is a number between 0 & 9)
3. Change the "value" field of "isoc AO. 2" to the required AO number.
   (Remember to include the leading ZERO)
4. Save the Changes & exit the task.

5.1.2.2 Monitoring of Proposal Status

During the period of the AO call, a member of the Science team is required to check (DAILY) the isocprop mail account in order to monitor the number and type (Accepted/Rejected/Mail Error) of responses being automatically sent to the proposers.

Access to the isocprop account is possible from the office network via the astro machine.

WARNING ONLY one person should access this account at any given time.

1. Configure the workstations for a telnet session to astro. (Type "xhost +astro")
   {The need for this step depends on the user's workstation set-up.}
2. Telnet to "astro.esa.int"
3. Login as "isocprop"
4. Confirm/Configure Display settings ("echo $DISPLAY")
5. Start Netscape mail application and check the various mail boxes (see Table 6)
   (If there are any errors (see section 5.1.2.2.1) and take appropriate recovery action.)
6. When finished exit both Netscape & the "isocprop" account on the astro machine.

5.1.2.2.1 Analysis of Mail Box messages:

Emails in the PASSES VALIDATED mailbox are of interest only for statistics whereas emails in the FAILED VALIDATION mailbox should be check to see if there are any consistent reasons as to why proposals are being rejected by PHS. One reason for proposals to be rejected could be misinterpretation, by the Proposer, of the AO supporting documentation. Another reason could be a discrepancy between the checks carried out by PGT and those performed by PHS.

Mail Box	Content
PASSED VALIDATED	Copy of all **Validated** Proposal Acknowledgements Emails
FAILED VALIDATION	Copy of all **Rejected** Proposal Acknowledgements Emails
ERROR	Copy of all Emails Return Address Errors

Table 6 - Mail Boxes used by "isocprop" account

Emails in the ERROR mailbox would indicate that the Mailer Task, running on the External Communications Machine (ECM) has detected errors in the return mail address contained in the original proposal. It should be noted that no checks are performed by PGT. Each email found in this mailbox needs to be manually checked to determine the source of the problem. If a match can be found the email is then forwarded to the correct address. A cover note should also be included advising the proposer that the email contained in the proposal contained errors and if the email in the ERROR mailbox contained an Acknowledgement of a Valid Proposal the proposer should be asked to resubmit the proposal with a corrected email address.

5.1.2.3 Proposal Analysis

5.1.2.3.1 Technical Feasibility Assessment

For each proposal submitted, as part of an AO Call, the ISOC assesses technical feasibility of the observations contained within it. See section 0.

The checks are systematically performed for all observations contained within a proposal. For each proposal/observation the ISOC complete a Technical Feasibility Form. The general layout of this form is shown in Table 7. The actual layout is however subject to change (for each AO Call) and the latest version in maintained by the Project Scientist.

5.1.2.3.2 Check of Target Visibility

The observer specified RA & DEC etc. of each observation must be entered, manually, into the Target Visibility Predictor (TVP) software. A check is then be made to determine the visibility periods available. The TVP User Manual (RD.28) contains all the details required to use the TVP.

5.1.2.3.3 Check of Requested Observation Time

For each observation submitted, the ISOC check whether the observer's requested Observation Time is in agreement with the values predicted by the Observation Time Estimator (OTE). The OTE User Manual (RD.29) contains all the details required to use the OTE.

Technical Feasibility Assessment Form[4]	
Proposer ID	**Proposal Title**
Assessed By	

1. Does NOT Conflict with Core Programme?	Yes / No
2. Target visible at Required Time?	Yes / No

Instrument Details	
3. Energy Range Valid?	Yes / No
4. Spectral Resolution Valid?	Yes / No
5. Spatial Resolution Valid?	Yes / No
6. Field of View Requirement Valid?	Yes / No
7. Timing Requirements met?	Yes / No
8. Instrument Modes Valid?	Yes / No
9. Others (Specify)	

Observation Time Feasibility	
10. Sufficient Information to Derive Feasibility?	Yes / No
11. Feasibility validated by OTE?	n.a./Yes/No
12. Feasibility Validated by Observer Manual (511keV line)?	n.a./Yes/No
13. Feasibility Validated for Diffuse Emissions?	n.a./Yes/No
14. Others (Specify)	

15. Dither Pattern Consistent with requested use of Instruments?	Yes / No
16. Others (Specify)	

Scheduling Feasibility	
17. Fixed Time Requirements Feasibility	Yes / No
18. ToO Trigger Feasibility	Yes / No
19 Others (Specify)	

Other Comments

ISOC Feasibility Recommendation:	
	Yes (feasible)/ No (Infeasible)/ To be discussed

Table 7 – Example of Technical Feasibility Assessment Form

[4] This table, along with Table 8, are maintained by the PS and subject to revision prior to each AO.

5.1.2.4 Proposal Updating (Post TAC Analyses)

5.1.2.4.1 Background

In support of the TAC process, members of the ISOC science team participate, as panel secretaries, in the various TAC panel meetings. A key part of their role, during these meetings is to record the panel recommendations & conclusion for each observation with a proposal. In order to carry out this task the ISOC scientist, on each panel, complete a TAC Panel Results Form/Spreadsheet. An example of the information /fields contained within this form/spreadsheet are given in Table 8. This table may be revised, prior to each AO.

At the end of the TAC process, and once the TAC panel members have confirmed that the form/spreadsheet has been completed correctly, the ISOC Science team merge the results of the various panels into a single spreadsheet. The ISOC Science team use the data contained in this spreadsheet to update all proposals/observations, for that AO, in the proposal database.

Table for AO-1 TAC Panel Results Form	
Column Number	**Column Description**
1	Proposal ID
2	Observation ID
3	RA (J2000)
4	DEC (J2000)
5	Requested time (seconds)
6	Grade [A, B, C, TOO(A), GRB (B1, B2)]
7	Recommended target
8	Granted time [sec] (Note: TAC "0 sec" for C-hitchhiker converted here into "1 sec" for PHS compliance). "0 seconds" in this column means REJECTED
9	Recommendation on dither pattern
10	Comments on data rights and/or data requests from other observations (also if specifically requested in proposal)
11	Comments on fixed time and/or TOO
12	Reasons for rejection
13	Other comments

Table 8 - AO-1 TAC Panel Results Form

5.1.2.5 Returning a Proposal (PGT Compatible version) to a Proposer

This procedure describes the steps necessary to extract (section 5.1.2.5.1) a copy of the proposals, from PHS, in a format suitable for their subsequent re-submission via PGT. The procedure also includes details of how to transfer the extracted files to the development/office network.

5.1.2.5.1 Extracting Proposals from PHS

1) Log in to the Operations Room PC (or UNIX machine) as “phsuser1” and start the PHS application. Available as a desktop shortcut on PC.

(The standard user login & password are sufficient.)

2) Select PHS option to "PHS to PGT Conversion"
3) Select the following 'sort criteria'.
   - AO number = xx *(Where xx stands for 01, 02, 03 etc.)*
   - Type = General Programme

4) Select all required proposals displayed by left-clicking the mouse on the first row and then (while holding down the "Shift" button) left-clicking the mouse and then select option "CONVERT"
5) The converted proposal is stored in PC directory C:\isoc\data\Converted_Proposals\. On the UNIX these files are stored in the equivalent directory. The proposals are stored with names in the format 'PI-Name_Proposal-Number.phs'
6) Log out of PHS.

5.1.2.5.2 Copy Proposals to the Development network

If only few proposals are to be transferred, to the development/office network, the best method of doing this is by using the "*cp2dev"* command. Refer to section 5.1.2.5.2.1. If a large quantity of files need to be transferred then it is best to burn them on to a CD or other form or removable media. Refer to section 5.1.2.5.2.2.

5.1.2.5.2.1 Copy a file directly from the UNIX machine.

If using the UNIX system entering the following command can transfer the files:

"*cp2dev* PI-Name_Proposal-Number.phs"

Files copied in this manner appear in the office/development system in the directory:

~home/isocops/DATA/copy

5.1.2.5.2.2 Burning files on to a CD (using PC[5] in Ops area)

Before one can copy the proposals from the PC to a CD ROM it is first necessary to get a copy of the files on the PC. This can task can be performed by starting PHS on the PC and executing the procedure in section 5.1.2.5.1.

In order to copy the files to a CD a blank CD should be inserted into the CD/DVD drive of the PC. The PC should detect the insertion of the CD and automatically start the application/program called NERO. *(If the application does not start automatically, use NERO ICON on the desktop.)*

1) After the insertion of a blank CD into the PC CD/DVD burner the NERO program should open a "New Compilation" window.
   - Select the option "Open" and from list of files displayed select "CD for PHS2PGT"

   This should result in the opening of a window called "CD for PHS2PGT". The various folders highlighted in this window are linked to the 'File Browser' window directory:

   C:\isoc\data\Converted_Proposals

2) Under menu option, "File" select the sub-option "Write CD".

[5] This procedure will be revised, prior to AO-3 call, to use the CD rewriter on the new Ops Server

3) Wait for confirmation that the Burning process is complete.
4) Eject CD and repeat from step 1) if additional CDs are to be created.
5) Log out of NERO program.

5.1.2.5.3 Send Proposal Back to a Proposer.

With the required proposal either copied on to a CD or transferred to a directory in the office/dev network, the file can be emailed back to the proposer. The file names are in the format: "PI-Name_Proposal-Number.phs".

1) On receipt of the request for an old proposal, the Helpdesk duty scientist should login as "inthelp" on the Astro LAN. (Refer to Rd.27 for details.)
2) Startup Netscape7 and the Netscape email facility. The INBOX contain a copy of the original Proposers request.
3) Select the "Proposal Return" template stored in the "Template" folder of Netscape mail tool. When you click on the template message it comes up, ready to be sent. All you need to do is attach the Proposal, stored on the CDROM, and enter the proposer e-mail address.
4) Reply to the message appending the converted proposal, with copy to inthelp@rssd.esa.int.

5.1.2.6 Creation of the CD with copy of Proposals for the TAC

For AO-3 the following information was required to be transferred to the CD:

A0-3 Proposals, including Science Justifications[7]
A0-2 Proposals (with Grade A observations still to be completed.)
A0-3 Documentation (as maintained on the ISOC AO Website)

Table 9 provides details of where the various AO proposal details are stored on the CD ROM.

Category		Location
AO-2	Compact Objects	c:\ao3cd\ao2\compact\
AO-2	Extragalactic Objects	c:\ao3cd\ao2\extra\
AO-2	Nucleosynthesis	c:\ao3cd\ao2\nucleo\
AO-2	Others	c:\ao3cd\ao2\others\
AO-3	Compact Objects	c:\ao3cd\ao3\compact\
AO-3	Extragalactic Objects	c:\ao3cd\ao3\extra\
AO-3	Nucleosynthesis	c:\ao3cd\ao3\nucleo\
AO-3	Others	c:\ao3cd\ao3\others\

Table 9 - Location of Proposals on the CD

Access to the data has been made easy, via a single index.html file. The lower level html page, displayed the proposals by AO & category. The list, per category had two hyperlinks per proposal. "P" & "J". Selecting "P" takes you to the proposal details as stored within the ISOC Proposal database and the selection of "J" opens the associated Scientific Justification. The justification is "as

[7] For *AO-3 it is proposed that the science justifications are stored on the CD in both postscript, if that was the original format, & pdf.*

submitted" by the proposer. All files were in PDF format and where a justification had been submitted in postscript, it was converted to pdf before insertion on the CD.

5.1.2.6.1 Selection of AO-03 Proposals

5.1.2.6.1.1 Copy/Save AO-03 Proposal, as PDF files, for the TAC

This procedure describes the steps necessary to save a copy of the AO-03 proposals, in PDF format, for distribution to the TAC.

1) Log in to the Operations Room PC as "phsuser1" and start PHS, using the desktop shortcut. (Standard use logins & passwords are sufficient.)
2) Select PHS option to 'View the Proposals"
3) Select the following 'sort criteria'.
   - AO number = 03
   - Category = 'X'
   - Status = Validated
   - Type = General Programme

   Where 'X 'is one of the following:

   Compact Objects; Extragalactic Objects; Nucleosynthesis; Others

4) Select all proposals displayed by left clicking the mouse on the first row and then (while holding down the "Shift" button) right clicking the mouse.
5) Select the "Print" options with printer set to "Acrobat PDF Writer". Click OK
6) Select required directory & click "SAVE/Print". The full directory path is:

   C:\ao3cd\ao3\'X'\prop

   Where "X" is 'compact' ; 'extra' ; 'nucleo' ; 'other'

   (You have to repeat/confirm this step for all proposals in the category.)
7) Repeat from step 3) for the next Category.
8) 'DISMISS' the window & exit PHS.

5.1.2.6.1.2 Convert Science Justifications into PDF

1) Login to Unix Station as PHSUSER1
2) Clean up the temporary Justification Directory by deleting all files contained in directory: **"/phsuser1/ao3cd/ao3/temp_psj"**
3) Open a window & go to the directory: **"/isoc/data/PSJ"**
4) Extract latest version of AO-2justification by typing:

   > justout 03 ../../../home/phsuser1/ao3cd/ao3/temp_psj

5.1.2.6.1.3 Sort Science Justifications by Category

1) Delete all files contained in the following directories:

   "/phsuser1/ao3cd/ao3/compact/just"
   "/phsuser1/ao3cd/ao3/extra/just"
   "/phsuser1/ao3cd/ao3/nucleo/just"
   "/phsuser1/ao3cd/ao3/other/just"

2) Open a window & go to the directory: **"/phsuser1/ao3cd/ao3/temp_psj"**
3) Execute sequentially each of the commands contained in Table 10:

Category	Command
Compact Objects	justsplit -a03 -ccompact -o/home/phsuser1/ao3cd/ao3 -sV
Extragalactic Objects	justsplit -a03 -cextra -o/home/phsuser1/ao3cd/ao3 -sV
Nucleosynthesis	justsplit -a03 -cnucleo -o/home/phsuser1/ao3cd/ao3 -sV
Others	justsplit -a03 -cother -o/home/phsuser1/ao3cd/ao3 -sV

Table 10 - Commands to Sort AO- 3 Science Justifications

Where "justsplit" is the name of the script to be run and the other fields are as defined in Table 11.

a	AO Number	Leading two digits of file name
c	Category	'compact' ; 'extra' ; 'nucleo' ; 'other'
o	Directory	Destination directory for the extracted files
s	Status (Optional)	V- Validated ; A – Approved ; S – Scheduled, M - Amalgamated
p	Priority (Optional)	Assigned Priority 1 = "A" ; 2 = "B" etc.

Table 11 - Definition of parameters in "justsplit" script

5.1.2.6.1.4 Copy/Save all Science Justification

1) Start WS_FTP_Pro (shortcut ICON is on desktop.)
2) Confirm that the Pop-up screen stipulates:
   HOST = isocopsv1
   USER Identifier = phsuser
3) Click the option "Connect"
4) In the left hand window (Local System) change the directory to point to:
   C:\ao3cd\ao3\'X'
   (Where "X" is 'compact' ; 'extra' ; 'nucleo' ; 'other'.)
5) In the right hand window (Remote System) change the directory to point to:
   ~/phsuser1/ao3cd/ao3/X/
6) Select and drag the 'just' folder on the Remote system to the local system.
7) Repeat for all four categories.
8) Log out of WS_FTP_Pro.

5.1.2.6.2 Selection of AO-02 Proposals

5.1.2.6.2.1 Copy/Save AO-02 Proposal, as PDF files, for the TAC

This procedure describes the steps necessary to save a copy of the AO-02 proposals, in PDF format, for distribution to the TAC.

1) Log in to the Operations Room PC as "phsuser1" and start PHS, using the desktop shortcut. (Standard use logins & passwords are sufficient.)
2) Select PHS option to 'View the Proposals"
3) Select the following 'sort criteria'.
   - AO number = 02

- Category = 'X'
- Status = Approved
- Type = General Programme

Where 'X 'is one of the following:

Compact Objects; Extragalactic Objects; Nucleosynthesis; Others

4) Select all proposals displayed by left clicking the mouse on the first row and then (while holding down the "Shift" button) right clicking the mouse.
5) Select the "Print" options with printer set to "Acrobat PDF Writer". Click OK
6) Select required directory & click "SAVE/Print". The full directory path is:

C:\ao3cd\ao2\'X'\prop

Where "X" is 'compact' ; 'extra' ; 'nucleo' ; 'other'

(You have to repeat/confirm this step for all proposals in the category.)

7) Repeat from step 3) for the next Category.
8) 'DISMISS' the window & exit PHS.

5.1.2.6.2.2 Convert Science Justifications into PDF

1) Login to Unix Station as PHSUSER1
2) Clean up the temporary Justification Directory by deleting all files contained in directory:

"/phsuser1/ao3cd/ao2/temp_psj"

3) Open a window & go to the directory: "/isoc/data/PSJ"
4) Extract latest version of AO-2 justification by typing:

> justout 02 ../../../home/phsuser1/ao3cd/ao2/temp_psj

5.1.2.6.2.3 Sort Science Justifications by Category

4) Delete all files contained in the following directories:

"/phsuser1/ao3cd/ao2/compact/just"
"/phsuser1/ao3cd/ao2/extra/just"
"/phsuser1/ao3cd/ao2/nucleo/just"
"/phsuser1/ao3cd/ao2/other/just"

5) Open a window & go to the directory: **"/phsuser1/ao3cd/ao2/temp_psj"**
6) Execute sequentially each of the commands contained in Table 12:

Category	Command
Compact Objects	justsplit -a02 -ccompact -o/home/phsuser1/ao3cd/ao2 -p1 -sA,S,M
Extragalactic Objects	justsplit -a02 -cextra -o/home/phsuser1/ao3cd/ao2 -p1 -sA,S,M
Nucleosynthesis	justsplit -a02 -cnucleo -o/home/phsuser1/ao3cd/ao2 -p1 -sA,S,M
Others	justsplit -a02 -cother -o/home/phsuser1/ao3cd/ao2 -p1 -sA,S,M

Table 12 - Commands to Sort AO-2 Science Justifications

Where "justsplit" is the name of the script to be run and the other fields are as defined in Table 11.

5.1.2.6.2.4 Copy/Save all Science Justifications

1) Start WS_FTP_Pro (shortcut ICON is on desktop.)
2) Confirm that the Pop-up screen stipulates:
   HOST = **isocopsv1**
   USER Identifier = **phsuser**
3) Click the option "Connect"
4) In the left hand window (Local System) change the directory to point to:
   C:\ao3cd\ao2\'X'
   (Where "X" is 'compact' ; 'extra' ; 'nucleo' ; 'other'.)
5) In the right hand window (Remote System) change the directory to point to:
   ~/phsuser1/ao3cd/ao2/X/
6) Select and drag the 'just' folder on the Remote system to the local system.
7) Repeat for all four categories.
8) Log out of WS_FTP_Pro.

5.1.2.6.3 Creating an HTML List/Table of Proposals

1) Logon to PC as PHSUSER1
2) Select "Start" button & select "Run a Program"
3) Enter the following command to create AO-1 tables:
   "c:\ao3cd\ao_scripts\ao2\createindex isoc"
4) Enter the following command to create AO-2 tables:
   "c:\ao3cd\ao_scripts\ao3\createindex isoc"

The tables created are stored in the directories:
C:\ao3cd\ao2\ & C:\ao3cd\ao3

5.1.2.6.4 Burn Master CDROM of Proposals

In order to copy the files to a CD a blank CD should be inserted into the CD/DVD drive of the PC[8]. The PC should detect the insertion of the CD and automatically start the application/program called NERO. *(If the application does not start automatically, use NERO ICON on the desktop.)*

1) After the insertion of a blank CD, into the PC CD/DVD burner, the NERO program should open a "New Compilation" window.
   - Select the option "Open" and from list of files displayed select "CD for AO-03"

   This should result in the opening of a window called "CD for AO-03". The various folders highlighted in this window are linked to the 'File Browser' window directory:
   C:\ao3cd

2) Under menu option "File" select the sub-option "Write CD".
3) Wait for confirmation that the burning process is complete.
4) Eject CD and repeat from step 1) if additional CDs are to be created.
5) Log out of NERO.

[8] This procedure needs to be revised so that it uses the CD rewriter on the new Ops Server.

5.1.3 Core Programme Submission

5.1.3.1 Pointed (Staring & Dither) Observations

The responsibility for entering of the Core Programme pointed observations, into the proposal database, is formally that of the ISWT. In practice, the task is performed by members of the ISOC Science Team, under the direction of the Project Scientist. After entering the proposals/observations the ISOC scientist, provide back to the Project Scientist, a copy of the information submitted. The Project Scientist then forward the information to the appropriate, ISWT nominated Research Scientists (R-Sci).

5.1.3.2 GPS & GCDE

GPS & GCDE observations are generated and entered into the Proposal Database using software scripts built & maintained by the software team. To ensure compliance with the scientific requirements of the Core Programme (RD.22), the ISOC science team checks the contents of the scripts.

5.1.4 Calibration & Engineering Proposal Submission

Calibration /engineering proposals/observations can be entered directly into the Proposal database by any member of the ISOC Science team, normally this done by the team member with responsibility for calibration activities. The PHS functionality used is available under the option "Create Proposal". Once the new proposal has been created, it can be edited, approved & scheduled just like any other set of observations/proposals.

The capability to copy complete proposals, within the proposal database exists. Access to this functionality is however restricted, to the ISOC Software team, and hence not general available to the ISOC Sci Team, Copying of full proposals is therefore something which can only be done for special one-off reason.

5.1.5 Observation Amalgamation

Although the PHS software can select candidate observations for amalgamation the final stages of creating an amalgamated observation requires human analysis. The procedure here does not address this analysis, as it is scientific in nature & very much source/observation objective dependent.

The 'man-machine' interface part of the amalgamation process/procedure is:

1) Start PHS & login as normal
2) Under PHS option "Amalgamation" select sub option "Amalgamate"
   (In this window, it is possible to specify the allowed distance, between the sources.)
3) Selecting the option, "Prepare" forces PHS to start the query on the database.
   (The query will result in the production of lists of possible candidates.)
4) These candidate lists need to be analysed to determine if the selected observations make scientific sense.
5) Once the candidate lists have been analysed, and updated if necessary the appropriate observations should be added to the core observations.
6) The list of observations, associated with each core can then be saved and printed.

5.1.6 OMC Delta Catalogue Maintenance

Before performing any updates to the OMC extension catalogue, a back up of the present version should be made. Backing up of the catalogue is preformed by using standard UNIX copy command.

The extension catalogue is located in the directory:

~ isoc/data/OMC/Catalogue/OMC_CAT_Vnnnn_ext.ASCII

The copy created should keep the same name /version details as the original, with the exception of the inclusion of the date YYYYMMDD, as the end of the name.

5.1.6.1 Add an entry to the OMC Delta Catalogue

If a list of sources has been provided it is better (saves typing & errors) to copy the file onto the operational system. (Via a floppy disc is probably the easiest way.)

1) Start PHS & login as normal
2) Under PHS option "CCS" select sub option "Edit OMC Delta Catalogue"
3) In the new pop-up menu/window, select the option "INSERT".
   The following Source Fields should be completed:
   a. ID – Value in this field is entered automatically
   b. RA
   c. DEC
   d. Std. Error in Alpha
   e. Std. Error in Delta
   f. Extension
   g. Priority – Value in this field is fixed to "1".
   h. In Corporation Date – Value is entered automatically
   i. Comments Field

Where the source characteristics are contained in a file, the details can be easily copied, field-by-field, using Copy & Paste. (i.e. Highlight the text to be copied, with Left Mouse button. Move curser it the appropriate PHS field and Right Click the mouse. The text can be copied/inserted by clicking the middle mouse button.)

4) Select "SAVE" and repeat from step 3) for each new source.
   The updated Extension Catalogue is stored in the directory/file:
   ~ isoc/data/OMC/Catalogue/OMC_CAT_V0002_ext.ASCII

5) Print the new/updated list & select "DISMISS" to close the window.
6) Exit PHS
7) Record update in the Log Book
8) Send an email to ISOC CCB (isoclib@rssd.esa.int) with copy to isdc_shift@obs.unige.ch informing them that the updates have been made. A copy[9] of the updated *OMC_CAT_V0002_ext.ASCII file* should be attached.

[9] File can be copied from the Ops network to the Dev network using the cp2dev instruction.

5.1.6.2 Delete an entry in the OMC Delta Catalogue.

1) Start PHS & login as normal
2) Under PHS option "CCS" select sub option "Edit OMC Delta Catalogue"
3) In the new pop-up menu/window, select the row to be deleted.
4) Select "DELETE[10]" from the list of options.
5) Select "SAVE" and repeat from step 3) for each source to be removed. The updated Extension Catalogue is stored in the directory/file:

   ~ isoc/data/OMC/Catalogue/OMC_CAT_V0002_ext.ASCII

6) Print the new/updated list & select "DISMISS" to close the window.
7) Exit PHS
8) Record update in the Log Book
9) Send an email to the ISOC CCB (isoclib@rssd.esa.int) with copy to isdc_shift@obs.unige.ch informing them that the updates have been made. A copy of the updated *OMC_CAT_V0002_ext.ASCII file* should be attached.

[10] Delete does not physically remove the entry from the table. It merely updates a flag in the table, which prevents the entry from being used by the OMCPS & displayed in the editor.

5.2 Observation Scheduling

An overview of scheduling process, and the tasks to be performed are provided in section 4.6. This section aim is to provide information to at least one level deeper. Due to the high degree of flexibility available to the Mission Planner, it cannot provide a systematic guide on which observations are to be scheduled at which time.

The 'procedures' contained here assume that the user/Mission Planner is familiar with the software packages described in RD.26 and the Project Scientist to Mission Planner Guidelines (RD. 21). The major S/W packages covered in RD.26 are:

- *Starmap*
- *Proposal Handling Subsystem*
- *Observation Scheduling System*

5.2.1 Routine Planning Activities

The actual task of generating a set of observation schedules is relatively straightforward. The real task is to determine which observations and in which sequence the mission planner wishes them to be scheduled. The mission planner has full freedom in determining both the observation and the order they will be scheduled. It is however assumed that he/she will follow the approved Long-term plan as close as possible. Deviations to the long term plan, for example in response to a TOO etc. will be tracked by the Science team Member who has been nominated by the Project Scientist as Mission Planning Responsible. It is assumed, periodically therefore, that the Mission Planning Responsible scientist will produce updates to the long-term plan. The nominated 'Duty' Mission Planner is expected therefore to use the Long-term plan and any issued updates as the scientific input to the planning process. Other inputs will be the need to perform Calibration & or Engineering observations. The need for any of these two later items to be performed will be confirmed at the regular ISOC planning meetings and at the weekly ISOC operations meetings. Refer to section 2.3 for details.

The main sequence of events, addressed in detail within the following sub-sections is:

- Importation of any new planning files from MOC
- Selection of Observations to be scheduled
- Generation of the Physical Observation Schedules
- Manual Checking & Sending of the Observation Schedules/files

5.2.1.1 Importation of any new planning files from MOC

Before commencing planning session the Duty Mission Planner should check to see if any new PSFs are available for import. The availability of new PSFs can be check, form within OSS by selecting the option "Process New PSFs", or by checking the content of the directory:

"~isoc/data/PSF/received"

In order to import, into OSS, new PSFs the Duty Mission Planner is required to start OSS select the option "Process New PSFs". The new PSFs (not yet imported) will be displayed in the corresponding OSS window. Highlighting the desired file and then clicking the "Accept PSF"

option performs the actual import. The success or otherwise of the import is indicated in the messages bar at the bottom of list window.

Warning:
The importing of a new version of a PSF will result in the automatic unscheduling of all observations, GSHO & RWBs associated with that revolution. The ISOC therefore should never (unless first agreed with MOC) import a new version of a PSF, where the resulting POS would have to be sent as an RPOS. An RPOS being defined as the re-planning of the on-going revolution or any revolution starting within 8 hours[11] of the time at which ISOC would submit the files.

5.2.1.2 Selection of Observations to be scheduled

Based on the Long Term Plan, approved by the Project Scientist, and the GPS & GCDE table produced & maintained by the Mission Planning Responsible, the Duty Mission Planner will, using the Starmap (refer to RD.26) select the areas of the sky (called Sky Bins) where it is possible to schedule observations. These Sky Bins being selected on user definable criteria such as:

- Sky Bin visible for greater than…
- Sky Bin visible in a specific revolution/week or month etc.

Once the appropriate/available Sky Bins have been identified, the Duty Mission Planner selects, from the database the Proposal/Observation he is interested in scheduling. In this way he can check their visibility. Once he/she is happy with his selection he/she can proceed to scheduling them. Refer to section 5.2.1.3.

5.2.1.3 Generation of the Physical Observation Schedules

Before scheduling any revolution the directory **"/isoc/data/PSF/accepted"** should be check, in order to confirm that the required PSFs have already been imported into OSS. (This information is not available from within OSS.) If it is concluded that the required PSFs are not already 'accepted', the procedure in section 0 should be performed to 'import' them.

1) Start PHS and select OSS option “View/Schedule revolution”
2) Enter the Start and End revolution number one intends to schedule, and click on "Schedule these revolutions"

Explanation of the top part of the session window (above "Selection statement")

3) "Start/End Revolution": The start and end revolution number is displayed.
4) "Display a Revolution": One can display a single particular revolution.
5) More windows can be opened to display the same or another revolution.
6) "Open a saved Set"/"Save this Set": One can open a saved set or save a set of SQL expressions that were entered in the "Selection statement" part of the session window.

[11] The 8 hours is an agreed number, introduced to allow MOC time to respond to the RPOS. It is not a physical constraint. If MOC are prepared /forewarned a new timeline can be created & introduced in 2 - 3 hours. Although technically not an RPOS, re-plan files with a start time that is outside of the normal working week should also be submitted as an RPOS.

"DBOB": One can choose between a skybin width and height of 10x10 (default) and 2x2. The 10 by 10 degrees is also used by Starmap. Using 2 by 2 degrees is more cpu intensive and does not necessarily improve the scheduling.

8) "Minimum visible duration": When scheduling observations ONLY skybins with the minimum visible duration value given (default is 30,000 seconds) can be scheduled. Values below typically 10,000 seconds (about 3 hours) are not recommendable. The values are PER revolution.

An Explanation of the Schedule Display Window

9) When the option "**Display a Revolution"** is selected, the Schedule Display window pops up. A timetable is shown for the whole revolution for the following properties:
   - "Scheduled": this bar shows the actual schedule.
   - Colours are: white - target, green - handover window, pink - slew, yellow - RWB.
10) Right clicking with the mouse gives two options: "Details" and "Unschedule".
   - When selecting "Details" a window pops up with some more detailed info (start and end times, what kind of event, etc.) on the particular part of the observation where one clicked.
   - When selecting "Unschedule" ALL scheduled observations and slews after the point where one clicked upon are deleted.
11) When a RWB has been inserted manually (see below), one can also select "Delete RWB". This deletes the RWB selected. Note that only manually inserted RWBs can be deleted, and not the ones that are defined in the PSF.
12) "Instrument": this bar shows when the instruments are on and can be used for doing scientific observations.
13) "Slew": this bar shows when slew can be performed. By right clicking on this bar one can insert manually RWBs. If one is inserted one can delete it again by right clicking on the particular RWB window in the "Scheduled" bar, by selecting "Delete RWB").
14) "Overlap": this bar shows when both Redu and Goldstone can have contact with Integral.
15) "RWB": this bar shows the possible times for RWBs.
16) "RMU": this bar shows the possible times for RMUs.

Note:
One can zoom in or out by clicking on "+" or "-" (top left of the Schedule frame), respectively.

One can delete all scheduled observations and slews by clicking on "Unschedule" at the top of the Schedule frame.

Information on the history of how the observations were scheduled with OSS, as well as info on times, observations, slews, pointings, etc. can be viewed in a separate window by clicking on "History" at the top of the Schedule frame.

17) "Schedule Summary": shows a table of the scheduled observations.

[13] Exiting using the “DISMISS” option will abort the planning session.

Note that this summary can be printed to a file by selecting "Save Summary as Tab separated ..." from "File" at the top of the Schedule window, or simply type Ctrl-T. The file can be found in "Summary" data directory and is called "XXXX.SUM", where XXXX is the revolution number (add zero's [0] before the number if it is less than 1000).

18) Select & Deselect Observations
Within the "Selection statement" window one manually select or deselect observations based on the key properties from the proposal database. The (de)selection is done by using SQL queries. Basically, from ALL keys of ALL tables selections can be made.
An example is: "and RA>75 and dec>65 and priority<3".

Note: ALWAYS start the SQL query with "and"! (This is because internally in OSS some SQL queries are already made). Also note that SQL queries are not case sensitive. Clicking on "Save this Set" above the "Selection statement" window can save SQL queries. A previous saved query can opened by clicking on "Open a saved Set" above the "Selection statement"

19) Selection of Perigee Attitude
When the revolution has not been scheduled before the Duty Mission Planner should select the option to use the ***last pointing for perigee*** attitude. This avoids long slews before perigee entry and thus saves science time.

20) Schedule the revolution
After the planner has completed & check the schedules he/she should commit them by selecting the option **"Schedule selected Revolutions".**

OSS now reads in every observation from the database and accepts all targets, which are in a visible skybin. Then scheduling is done which takes into account the SQL queries and the few options. This may take a while (e.g. due to unscheduling or calculating dither patterns). Fixed Time observations are scheduled first, and then the Normal Time observations are filled taking into account the various queries. When scheduling is done, one can review the current schedule by clicking on "Display a Revolution", see above.

21) Check the schedule if there are any observations which are potentially `SPIBIS-ed'.
If a particular observation is `SPIBIS-ed', unschedule the revolution from that observation and start to re-plan from there.

22) Exit or Dismiss
Exit the scheduling session, using "Generate Files[13]" option in order to save the new schedule and create the POS, ICP, POD and OPP. or
Exit using the "DISMISS" option will abort the planning session.
Exit the PHS application

5.2.1.4 Manual Checking & Sending of the Observation Schedules/files

1) Check the POS produced for the revolutions scheduled. (Refer to section 5.2.4)
2) If POS are deemed 'OK', **Enter PHS** and send the POSs/ICP to MOC using the OSS option:

"Send POS/ICP"

3) After sending the POSs/ICPs, the associated POD/OPPs should be sent to ISDC using the OSS option:

"Send POD & OPP"

4) After approximately 3 minutes check the directories **/isoc/data/POS/sent/** and **/isoc/data/POD/sent/** to confirm that the POS/ICP & POD/OPP have been sent. i.e. check if the files appear in these directories.

(Note: Copies of all files sent via IFTS are copied by the system to a mirror set of directories on the office/development server. "~home/isocops/data/……")

5) Update ISOC Log Book identifying the POS/POD versions created, the time at which they were sent.

5.2.2 Target of Opportunity Scheduling

The decision to schedule a TOO shall be taken by the Project Scientist or his/her nominated deputy. TOO Management is addressed in sections 4.4 and 4.4.2. This section deals only with the activities required to schedule the observation, once it has been approved.

5.2.2.1 Check Existing Schedule

1) **Enter OSS**
2) Select the revolution(s), which is (are) going to be rescheduled.
3) Display the schedule of that (these) revolution(s).
4) Determine a suitable time for the start of the TOO [generally something like more than ~10 hrs from the time one starts this re-plan].
5) Check if there are any Fixed Time observations after that time.
6) Quit Scheduling Session [i.e. no change in schedule!].
7) Quit OSS

5.2.2.2 Notify MOC/ISDC that re-plan is about to commence

Before commencing a TOO re-plan the ISOC duty scientist should send an email &/or telephone the MOC & ISDC to inform them that the re-plan has been approved. In the email the ISOC duty scientist should indicated the proposed time, derived in section 5.2.2.1 bullet 4), at which the present schedule will be interrupted. ***If the re-plan is to be sent as an RPOS some iteration with MOC on the exact time for the transition may be required.***

5.2.2.3 Enter TOO proposal/observation Start Time

1) **Start PHS** *and open the PHS application View Proposal.*
2) Select the required TOO proposal/observation [Click on "Details" and "Checkout"]. Note that it is assumed here that if a new Proposal was/is required, to support the TOO, that the necessary observation(s) have already been entered directly using PHS.
3) Enter the earliest and latest start times of the TOO observation
4) Earliest time is the suitable time selected in 5.2.2.1 bullet 4)
5) There should be sufficient time between the earliest and latest start time. This will some flexibility in scheduling and also accommodate overheads which may be required to perform 'long slews'. In general it is proposed to allow 12 hours between earliest and latest time. Note that the status of the proposal should be "approved".
6) Commit the proposal; the proposal database is now updated.
7) If there were any Fixed Time observations after the earliest start time, they should be updated as well: select the corresponding proposal/exposure [Click on "Details" and "Checkout"], "reset" the fixed time intervals [the status of the observation /exposure now becomes unscheduled], and commit.
8) Close the PHS applications.

5.2.2.4 De-commit Existing Schedule & Generate new one

1) **Open OSS application "View/Schedule"**
2) Enter the revolution that is going to be rescheduled.
3) Display the schedule of that revolution.
4) Un-schedule the revolution from earliest start time [see section 5.2.2.1 bullet 4) and 7); put cursor on "Scheduled"-bar, right-click and "unschedule"].

5) Go to "Session Window". Select "Use previous perigee attitude" [so as not to affect the start attitude of the next revolution].
6) Schedule selected revolution. Check the schedule; the TOO should be in now.
7) Save schedule summary and save statistics [click on "File"].
8) Exit the scheduling session, using "Generate Files[14]" option.
   i.e. new schedule is now saved and POS, ICP, POD and OPP are created.
9) Exit the PHS application

5.2.2.5 Manual Check & Sending of planning files

1) Check the POS (Refer to section 5.2.4)
2) If POS is 'OK', send POS and ICP to MOC. Notify MOC (#integralogs@esa.int), with copy to ISDC (isdc-ops@obs.unige.ch & isdc-shift@obs.unige.ch), by e-mail and then telephone the SPACON (x62408) to inform him/her that the files have been sent. The email notification should clearly identify the point/time at which the RPOS deviates from the original schedule.
3) After approximately 3 minutes check the directory **/isoc/data/POS/sent/** to confirm that the files have been sent.
4) Wait until MOC verify that POS is OK. (Refer to section 5.2.5)
5) Once MOC have verified that the POS has been accepted the POD and OPP should be sent to ISDC.
6) Notify ISDC by e-mail (isdc-ops@obs.unige.ch with copy to isdc-shift@obs.unige.ch) and telephone (+41 22 950 91 **70, 71 or 73**) that the POS has been accepted by MOC and that the POD & IOP associated with it have been sent. (Refer to AD.7 for details)
7) After approximately 3 minutes check the directory **/isoc/data/POD/sent/** to confirm that the files have been sent.
8) Update ISOC Log Book identifying the POS version sent, the time it sent & the scheduled time of the TOO.
9) Inform Project Scientist, SCOM & observer that the TOO has now been scheduled and that the files have been sent to MOC & ISDC. Inform also the observer, whose observation was unscheduled, that a TOO has been implemented and that his observation will be re-scheduled later.

5.2.3 Soft TOO Scheduling

The Soft TOO capability is supported via the addition of a new source to the OMC Delta/Extended Catalogue (refer to 5.1.5.) followed by the regeneration of the appropriate revolution files (POS/ICP etc.). After they have been regenerated, the files should be sent to MOC & ISDC.

Normal TOO protocols should be followed, with respect approval by PS & co-ordination with MOC.

Regeneration here implies starting OSS, opening the applicable revolution(s), for display and exiting again. The files should then be checked & sent as stipulated in section 5.2.2.5. At time of sending the planner has the option of specifying if the POS should be sent as an RPOS.

[14] Exiting using the "DISMISS" option will abort the planning session.

5.2.4 Visual Checks on Generated Planning files

5.2.4.1 Manual Running of the POS Checker

Following the creation of a POS/ICP OSS will automatically run the POS Check programme. This programme has been designed to check the POS for violation of any POS ICD constraints. Should any manual editing of a schedule (POS or ICP) have taken place, it is recommended that the mission planner manually re-run the POS Checker programme.

This can be carried out as follows:

1) Log on to the operational system as phsuser1 and select the directory:
   ~isoc/data/POS/generated

2) Enter the command:
   $ **runCheckPOS RRRR VV >** ***/isoc/data/Summary/POS_Check_RRRR_VV.txt***

   (Where RRRR VV is the revolution & version of the POS/ICP to be checked.)

5.2.4.2 Creating the POS Summary File

The POS summary programme can be used to create a very useful ASCII summary of a POS. To generate & save a POS Summary the user should enter the following UNIX instruction:

$ **genPOSSummary** ***/isoc/data/POS/generated/RRRR_VV.POS***
> /isoc/data/Summary/POS_Summary_RRRR_VV.txt

When a new POS has been created for an already existing revolution, for example a TOO, it is recommended that the new POS Summary be compared with the old one. This can be done by using the UNIX 'DIFF' command. When the 'diff' is performed on two version of the POS Summary the two files should be identical 'up to the point where the RWB & slew to the TOO have been scheduled. The files should also confirm that the GSHOs have not been moved. Both of these checks are critical, in the case of an RPOS, otherwise MOC may well reject the planning files. If differences are detected in the two files, these differences should be brought to the attention of the MOC, before their submission.

5.2.5 Checking the Planning Messages

Following the submission of the POS & ICP, and prior to the reception of the Timeline Summary, the ISOC expect to receive the following four different message types:

- EPOS Validation Message
- APF Validation Message
- Cross Validation Message
- Timeline Generation Message

The header of these messages, see RD.11, will contain an indication of whether that part of the Timeline generation process has been successful or not, the ISOC Mission Planner can there monitor the progressive generation of the Timeline by MOC.

The reception of a message indicating the failure of a specific part of the generation sequence, especially EPOS & APF generation, will provide the ISOC advanced warning that MOC may reject a POS. These Planning Messages are accessible, to the ISOC team, on both the office/development and operational networks. They are located in the directory ~ ***isoc/data/MPMF/received/***

5.2.6 Reception & Validation of Timeline Summary

At the end of the Timeline Generation Process, the MOC will send to ISOC, via IFTS, the Timeline Summary for formal approval. Since the IFTS at ISOC, does not trigger any 'alarms' when a file is received the MOC will also send an email to the Mission Planners advising them of the new Timeline Summary[15].

[15] Copies of the TSFs, sent by MOC via IFTS, will be stored on both the operational and office/development environments. In the office/development system they are stored at "~home/isocops/data/TSF/received"

5.2.7 Handing of Contingencies

5.2.7.1 Network Problems @ISOC

Should the subnet, to which the ISOC ECS machine is connected, fail it will not be possible for the ISOC to send & receive any files via IFTS. The impact of a short (couple of days) failure of the subnet is negligible, unless the ISOC has to undertake a critical re-plan. Critical re-plans are basically re-plans in response to a ToO.

5.2.7.1.1 Alternative method of getting data to the Operational System

All ToO alerts are received and stored on the Astro machine and assuming that machine is still functioning the data can be accessed from any the RSSD subnets. The proposal data can thus be printed off and manually entered in the PHS. If Astro is down and ISDC has detected a ToO the back up for them would be to send the ToO characteristics, to ISOC, by fax.

5.2.7.1.2 Alternative method of transferring planning files to MOC

In order to send the planning files to MOC, by passing the failed ISOC subnet, the files will have to be copied (DAT or Floppy) from the operational system so that they can be emailed to MOC. Assuming the failure is restricted to ISOC subnet the files could be installed on any of the 'astro' machines. If 'astro' is also down any PC, with email capability will do.

The two files to be copied, & sent to MOC, are the POS & ICP. (RRRR_VV.POS & RRRR_VV.ICP) Both of these files are located in the directory ***/isoc/data /POS/generated/.***

The files should be emailed to the address #integralogs@esa.int. After sending the files, the SPACON should be called (x62408) to let him/her know that they have been sent.

5.2.8 Special Observation Related Procedures

5.2.8.1 OMC FF & DC Calibrations

5.2.8.1.1 Nominal OMC FF & DC Calibration Sequence

The ISOC routinely (~ every 12 revolutions) schedule a sequence, normally 6, OMC FFC calibrations, followed by a single DCC calibration. The required sequence of commands, to perform these calibrations is given in Table 15. Between each calibration command, and the subsequent Standby command a delay is required, equivalent to the time required to perform and download the calibration data. This delay is dependent on both the calibration command content and the allocated OMC TM rate. The Business Rules, within PHS, will automatically calculate this delay.

Cycle	Command	Comment
1	MEFFCA01	OMC FF CAL Command
	Delay – dependent on MEFFCA01 content	
	MESTBY01	OMC Stand-by Command
2	**MEFFCA01**	OMC FF CAL Command
	Delay – dependent on MEFFCA01 content	
	MESTBY01	OMC Stand-by Command
3	**MEFFCA01**	OMC FF CAL Command
	Delay – dependent on MEFFCA01 content	
	MESTBY01	OMC Stand-by Command
4	**MEFFCA01**	OMC FF CAL Command
	Delay – dependent on MEFFCA01 content	
	MESTBY01	OMC Stand-by Command
5	**MEFFCA01**	OMC FF CAL Command
	Delay – dependent on MEFFCA01 content	
	MESTBY01	OMC Stand-by Command
6	**MEFFCA01**	OMC FF CAL Command
	Delay – dependent on MEFFCA01 content	
	MESTBY01	OMC Stand-by Command
7	**MEDCCA01**	OMC DC CAL Command
	Delay – dependent on MEDCCA01 content	
	MESTBY01	OMC Stand-by Command

Table 15 - Nominal ED Sequence of OMC FFC & DCC

5.2.8.1.2 Creating & scheduling OMC FF & DC Calibrations

With the present PHS implementation, this nominal FFC & DCC sequence can be scheduled as two consecutive observations. The first observation contains the FFC observations and the second the single[16] DCC observation. These observations use the specially defined, by ISOC, OMC FF_Cal_Multiple and DC_Cal_Multiple modes.

- the FF_Cal_ Multiple mode consists of the STBY ED followed by the FFC ED

[16] Until SCREW 400 has been implemented, there is an implementation constraint that the DC_Cal_Multiple should only contain one observation/iteration of the ED sequence. The observation duration is also fixed to 2000 seconds)

- the DC_Cal_Multiple mode consists of the STBY ED followed by the DCC ED, followed by the STBY ED.

5.2.8.1.2.1 Building an OMC FF & DC Calibration Proposal

The easiest way to build a new proposal is of course to copy an existing one and simply updating the parameter contents (if required), changing the attitude to be used, and enter the new start time[17]. The number of OMC FFC calibration 'runs' to be performed can be adjusted by adding or deleting a calibration set, to the first observation.

The attitude to be used, in any specific FF/DC calibration proposal/observation, will depend on the other observations to be scheduled. The OMC list of preferred calibration attitudes is given in Table 27 (section 7.5). The source name of the proposal should reflect the attitude used.

5.2.8.1.2.2 Calculating the required Observation Times

Once all the calibration sets have been created and the required parameters entered the observation durations need to be calculated. The easiest way of determining the required observation duration for these observations is to set the Approved Duration to 1 second and then commit them. This will result in a Business Rule failure (one for FFC & one for DCC) and the failure messages will tell you the minimum[18] value required.

The Approved Duration, for the FFC observation should then be set to the value provided by the Business Rule plus approximately 2 minutes.

The Approved Duration for the DCC observation must be set to at least 2000 seconds. If for any reason, the required duration for the DCC observation is greater than ~1900 seconds, the interval (stored in CCS) between the DCC ED & the second STBY ED will have to be increase accordingly.

5.2.8.1.2.3 Scheduling Constraints for the OMC FF & DC Calibrations

The following constraints exist, when scheduling the OMC FFC & DCC observations:

1. Observations should start AT LEAST 10 hours after belt exit
2. Observations should not be scheduled over a GSHO or RWB event.

5.2.8.1.2.4 Scheduled ED sequence

With the present PHS/CCS implementation the generated ED sequence is still not optimum for operations. The final output sequence contains an unwanted STBY ED, before the first OMC FFC ED. This ED has to be deleted, from the POS & ICP, before the schedule is executed. If not the OMC instrument will generate an exception message because it is already in standby. In order to avoid any editing of the POS & ICP, it has been agreed, with the MOC planners, that they will remove these EDs.

5.2.8.2 The Handling of GPS observations

In AO-2 Galactic plane scans (GPS) are scheduled every 4 revolutions for arcs which fall roughly in quadrant 1/2, i.e., the arc of which the midpoint has a Galactic longitude, l_II between 270 and

[17] OMC FFC & DCC are scheduled as fixed time observations.
[18] The Business Rule calculates the min time by adding up the required duration of each OMC calibrations ED.

260 degrees or between 0 and 90 degrees. They are scheduled every 8 revolutions for arcs which fall roughly in quadrant 3/4, i.e., the arc of which the midpoint has a Galactic longitude, l_II between 90 and 270 degrees. When both arcs of quadrant 1/2 and quadrant 3/4 are to be scheduled, they have to be done in subsequent revolutions. The order (as well as the order in which the arc itself is to be done) is not critical and may depend on other targets to be observed in the corresponding revolutions.

Due to the Sun, anti-Sun, moon and earth constraints there can be up to 3 arcs of the GPS pattern visible at a particular time. Normally however there are only 2. Based on the Long Term Plan, the mission planner, using Starmap and TVP, determines which the parts of the scans are visible, and then optimising these visibility periods against the total allocated time for the GPS.

In generally GPS scans are best scheduled at the beginning of a revolution. The reason for this being that long slew, to the first GPS pointing, may be unavoidable. By scheduling the GPS, as the first observation in a revolution means that any long slew, required to get to the start point, will take place before exiting the radiation belts.

Selecting a specific GPS scan & arc of scan for scheduling
The proposal numbers for the GPS scans, in AO-02, start with 02998.

- From within PHS select "View Proposals" option
- Select "ISWT survey" under "Type" & make "Type" active as a selection criterion
- Select the ISWT GPS and view the proposal by clicking on "Details".

The GPS proposal has 52 records. They have numbered "001", "002", "003", etc. The first 3 digits are for the pattern number. There are normally two records for pattern 1 (`sub records'), corresponding to 2 arcs which may be visible during a year.

- To activate a particular GPS scan for scheduling select the appropriate record(s) and click on "**Checkout**".
- Fill in the Earliest and Latest start times of that particular part of the scan. If the GPS is to be scheduled at the beginning of a revolution, the Start time should be set to a value at least 1 hour after perigee. When the Start & End times are entered, the revolution number is automatically calculated & displayed.
- Enter also the Start Point and End Point of the GPS (these values should be taken for the GPS table maintained & published by the Mission Planning Responsible.).
- The Approved time should be updated by clicking on "Update Approved time." under Start Point of GPS.
- When one has changed the necessary records **"COMMIT"** it and **"DISMISS"**.
- Exit PHS
- The modified GPS scan can now be called up in OSS

5.2.8.3 The Handling of GCDE observations

As with the GPS the Mission Planning responsible identifies, from the LTP when specific parts of the GCDE are visible and hence should be scheduled. The mission planners also maintain a list/table of pointing positions (RA & DEC) of each point with the GCDE, identified by Pattern ID & a Pointing number.

Selecting a specific GCDE scan for scheduling

For AO-1 the proposal numbers started with 01999 & for AO-2 they start with 02999 etc.

- From within PHS select "View Proposals" option
- Select "ISWT survey" under "Type" & make "Type" active as a selection criterion
- Select the ISWT GCDE and view the proposal by clicking on "Details".

The GCDE, in AO-2, consists of seven different patterns. Each pattern defines two proposals. (For pattern 1 we have proposals 0299911 & 0299921; for pattern 2 we have proposals 0299912, & 0299922 etc.) An observation in each proposal consists of all the pointings within that pattern. Since a pattern is scanned more than once during the AO, there are several "identical" observations within each proposal.

The structure of the GCDE & its patterns are explaining in RD. 35. The activation/selection of a specific pattern (Proposal) & column (Observation) is performed in a manner similar to that of GPS.

- To activate a particular GCDE scan for scheduling select the appropriate record(s) and click on "**Checkout**".
- Fill in the Earliest and Latest start times of that particular part of the scan. If the GCDE is to be scheduled at the beginning of a revolution, the Start time should be set to a value at least 1 hour after perigee. When the Start & End times are entering the revolution number is automatically calculated & displayed. (Always check that the displayed revolution number is the correct one!)
- Enter also the Start Point and End Point of the GCDE (these values should be taken for the GCDE table maintained & published by the Mission Planning Responsible.).
- The Approved time should be updated by clicking on "Update Approved time." under Start Point of GCDE.
- When one has changed the necessary records **"COMMIT"** it and **"DISMISS"**.
- Exit PHS
- The modified GCDE scan can now be called up in OSS

5.2.8.4 Managing the OBT Wrap Round

Approximately ever 193 days the On-board time, as transmitted in the Broadcast packet, will be observed by the instruments to wrap round. If this 'apparent' wrapping round of the OBT were to occur while IBIS is in either Standard or Polarimetry mode, the onboard Histograms process would 'freeze'. Autonomous 'unfreezing' will only take place when/if the instrument detects a valid slew pointing transition/sequence of events. In the case where INTEGRAL is dithering, and the wrap-round takes place during a pointing, any histogram's being generated will be corrupted. In the case of a long staring observation the corruption of the histograms process would lead to the loss of all histograms that would have been generated during the long pointing.

It is therefore important that ISOC avoid scheduling a long staring observation when wrap-round is expected to occur. To do this the ISOC should schedule a 'fixed time' Engineering Observation, with a duration of approximately 15 minutes centred on the predicted wrap-round time. The MOC are required to advice the ISOC, as part of the regular telecon/meeting, when the wrap-round will take place.

The engineering observation should configure ALL instruments back to the ISOC defaults specified in the Instrument Modes TN (RD.33).

5.2.8.5 Handling of SPI Annealing & associated PSD Calibration

SPI annealing & the PSD calibration operations are prepared offline and inserted into the PHS as a series of Fixed time Observations. Their scheduling is therefore performed in an identical manner to any other Fixed Time Observation. The sequence of events surround each SPI annealing are discussed in a dedicated meeting involving representatives of MOC, SPI Team & ISOC.

As part of this process, the ISOC Sci Team identify all observations (normally IBIS based) suitable for scheduling in parallel with the proposed SPI annealing sequence.

5.2.8.6 Manual Insertion of RWBs

The ability, of ISOC, to be able to manually insert in to the POS and RWB, at a specific time or place was developed in order to minimise POS rejection, due to wheel bias profiles. This capability was needed if a schedule had to be modified in response to a ToO or Ground Station contingency. The planner was expected to insert an RWB before the slew to the to the new observation.

The need for the planner to calculate when and where a RWBs had been, has been removed with the deliver of ISOC system v10. In v10 OSS determines if an RWB is needed and prompt the planner, during the schedule session, to confirm its' insertion.

The manual insertion capability has however been retained, as a OSS functionality, to cover contingency cases/requests detected by MOC.

To manually insert a RWB the planner, need simply right click, the mouse, whilst holding the cursor over the appropriate point in the OSS schedule visualisation window.

5.3 Observation Status Monitoring

5.3.1 Check for reception of new ECS files

On a regularly (daily) basis, the responsible ISOC scientist is required to check for the reception of Exposure Completion Status (ECS) files, from ISDC. These files are received via IFTS and are stored, on the development/office network, in the directory:

~isocops/isoc/data /ECS/received/

The simplest way of checking for these files is by typing:

"ls -lrt ~isocops/data/ECS/received"

5.3.2 Processing ECS files

If any new files are present, the Duty Proposal Handler should log into PHS, in the operations room. Normal user ID & Password are applicable.

- Select the PHS option "**Import/Export Files**"
- Select option "**ECS Process**"

One by one, the user can process the ECS's by either double-clicking on the filename, or selecting the filename and clicking open.

After a few seconds, you have an overview of the good times. Check the good time and compare it to the scheduled time. Normally they are either very close or caused by a low PICsIT good time. Normally one tends to ignore the low PICsIT good times, since it was not possible to analyse the data anyway, but this might change in the future. If there are low good times, this should be flagged in kept in mind for the telecon (however, if there is a low good time for only one pointing of a long observation this can be disregarded).

Now click on print, select proper printer (i.e. pr-duplex-nb, to avoid banner page) and select landscape under "options". The printouts should be filed.

5.3.3 Generation & sending of OCS files

Once the ECS files have been imported, a new set of OCS files should be generated. This is also carried out from the PHS option "**Import/Export Files**". Care must however be taken to first select the proper AO (01,02,88) number, before generating & sending the OCS.

- From within the PHS option Import/Export Files select OCS option "**Generate ALL"**
- When the processing is complete select OCS option "**Send ALL**".

5.3.4 Preparation for ISOC-ISDC Teleconference

In order to prepare for the telecom, refer to section 2.3.4, one needs to produce/obtain an overview of the "Good Times". This can be done using the PC in the operations room.

- Log in to the PC using the same username and password as on the Solaris machine.
- Double click on "shortcut to observation_status.xls".

Go to the "query"-sheet, select "data" and click "refresh". Then go to the "observations"-sheet and print this one. This printout gives an overview of the total good time and good time per instrument for each observation.

When deciding on whether the data is good enough to be distributed one should generally ignore PICsIT good times and accept good times within 5% of the scheduled time. In addition, 10% deviations for short observations are accepted (since rescheduling e.g. 5 ks is a major overhead). However, these are only vague guidelines and should be looked at on a case-by-case basis. In general, the good times received are normally very close to 100%, unless something significant (e.g. annealing) has happened.

When deciding on distributing the data it should be kept in mind that data taken within 6 weeks should be processed as one set and distributed together, so a look at the executed revolutions (or in exceptional cases the short-term schedule) is needed.

Prior to each telecom, the ISDC sends a list of observations to be discussed. From the printout obtained from the spreadsheet, it is clear when an observation is "successful" (from an "instrument on" point of view) or not. If not (which is an exceptional case) extra time should be credited to the observation, and the observer should be informed through the helpdesk. However, since in practice there is always a large delay before the rescheduling will take place, also the dataset of the short observation should be distributed.

5.4 Science Data Archive Management

TBW. Background information can however be found in the following documents:

- Archive Software Joint Development Plan (RD.31)
- ISOC-ISDC Interactions Document (AD.7)
- ISOC-ISDC ICD (RD.11)

5.5 ISOC System Administration & Librarian Tasks

In line with RD.24 & RD.34, all external deliveries, or notifications that an external delivery is available, should be routed to the ISOC Librarian, for action. The email address of the ISOC Librarian is given in Table 3 and RD.24.

After received the delivery note/notification, the ISOC librarian fetches (if appropriate) the applicable item(s) and place them in a dedicated software directory **(/isoclib/deliveries/xxxx)**. Details of the delivery note are also circulated to all ISOC personnel. Depending on the nature of the delivery, software and or data item, a member of the Software and or Science team inspect the new delivery and report their findings to the Delivery Review board, which is triggered by the ISOC Librarian's email. In the case of the ISOC, due to the small size of the team, the Configuration Control Board (CCB) performs the tasks of the DRB.

During the CCB, the decision as to how to proceed with the deliver is taken. That decision will depend, not just on the feedback received from the initial ISOC team members' analysis but also on any possible implications it may have for external ISOC parties. The CCB also crosschecks the delivery against RD.20, in order to ensure that all applicable GS CCB requirements are covered.

The external deliveries, to the ISOC are normally be received from MOC and occasionally OMC, ISDC and Southampton. Each of these deliveries can be divided in to software update, which will generally be infrequent and data or table updates. The latter are expected to be more frequent.

Once a file, or S/W packages has been approved by the DRB/CCB the ISOC Librarian updates the S/W development links to ensure that they now point to the newly approved file/software package.

Where appropriate, for example in the case of the OMC Catalogue, the ISOC Librarian contacts ISDC and advises them that a new catalogue has been approved. Refer to section 5.5.1.3 and RD.11 for further details on OMC Catalogue updating and RD.34 for details of all multi-site configured items.

RD.20 and RD.25 cover, in some detail the procedures used by the ISOC S/W team, to ensure that the system configuration is maintained. The following subsections therefore concentrates on configuration control activities relating to external deliveries.

5.5.1 ISOC Librarian Tasks

5.5.1.1 Flight Dynamics Packages

Table 16 contains a list of all Flight Dynamics files transferred to ISOC, from MOC. As can be seen they fall into two categories. Software & associated data files.

All Software files are sent to the ISOC, by surface mail, on CDs. The various data files, which are updated more frequently, are sent/received via the IFTS.

All Flight Dynamics deliveries, data or S/W, are accompanied by a delivery note. It is assumed here that the delivery note, for those files transferred via IFTS, take the form of an email to the ISOC Librarian. The email acts as the trigger for the librarian to retrieve the files from the operational machine, where all IFTS files are sent/stored.

The files, software & data, are stored in the appropriate **/isoclib/deliveries/FDS.xxxx** directory on the development network. The procedures relating to the installation of these software & data files are contained in RD.25.

Description	Method of Transfer	Format	Update Rate	Comment
Attitude Constraints Checker S/W	CD	Libraries	-	
Attitude Constraints Checker Data	IFTS	Binary	Biweekly	
DBOB S/W	CD	Libraries	-	
DBOB Data	CD/IFTS	Binary	Every 2 - 3 months	
Slew Time Predictor S/W	CD	Libraries	-	
Slew Time Predictor Data	IFTS	Binary	Biweekly	
Orbit Access File	IFTS	Libraries	Weekly	Orbita & Revno files (Sect.5.5.1.1.1)

Table 16 - List of Flight Dynamics deliveries

5.5.1.1.1 Updating of the Orbita & Revno files used by ISOC

New copies of Orbita & Revno files are received from MOC/FD, automatically every 3 - 7 days. On a regular basis, at least once per month, these files need to be installed on the ISOC operational system. The present baseline is for the ISOC software librarian to import the latest versions available, at the start of each week. The procedure to do this is given below.

1) Log in as 'isocsys', run PHS & select.
2) ***Confirm that no other user is using OSS & PHS before proceeding.***
3) Select CCS option "**FD Files & SPIBIS**"
4) Select button/option "**Install Data Files**".
5) A series of Pop-up windows appear, referring to first Orbit & then the Revno file. Click "OK" for each of these windows.

6) When the importing of the new files is completed select the option "**Recalculate All**". After this option has been selected PHS will begin to systematically recalculate the SPIBIS constraints for all observations. The process may take a few minutes.
7) When PHS has finished recalculating/regenerating the list of SPIBISed observations, print the new REVNO file.
8) Clicking the "Dismiss" button can close the window.
9) Log out of PHS & record in log book that the new set of Orbita & Revno files have been installed.

5.5.1.2 IODB & ED Deliveries

In addition to the Flight Dynamics files, transferred to ISOC from MOC, the ISOC also receive the Event Designator Browser. This browser is a subset of the much larger IODB and contains the details required by ISOC to command the correct instrument configuration. Table 17

Description	Method of Transfer	Format	Comment
Integral Operational Database (IODB)	FTP	MS-Access	Baseline is that this file is not sent to ISOC. Instead ISOC receive the smaller ED Browser - see below
Event Designator Browser	Email FTP	MS-Access	Placed on the MOC ftp server as a 'Zipped' MS Access file of ~ 6 M. Used by ISOC to extract ED details

Table 17 - Other MOC Deliveries

The IODB contains details of not just the required Event Designators but also all satellite TM parameters. At an estimated size of ~100 Mb this file is not very easy to manage/manipulate. The ED Browser on the other hand is much smaller ~30 Mb (~5Mb when compressed) and in addition it support easy visualisation of the EDs.

Following the reception of the delivery note/Email, from MOC, the Software Librarian retrieves the file, via FTP, and place it in the appropriate 'new' ED Browser directory on the ISOC development system. **(Typical directory structure is /isoclib/deliveries/iodb_dd_mm_yy)**

The zipped & unzipped versions, of the MS Access have the formats:

Event Designator_2K_dd_mm_yy.zip or Event Designator.mdb

5.5.1.3 Deliveries from OMC Team

Table 18 contains a list of the OMC files to be received by ISOC.

Description	Method of Transfer	Format	Update Rate	Comment
OMC Pointing Software	FTP	Libraries	-	
OMC Catalogue	FTP	Ascii	Every AO	
OMC Delta Catalogue input	Email	Ascii	-	Provided to ISOC every time a new 'temporary' addition to the catalogue is to be added.

Table 18 - List of OMC Software & Data File deliveries

The OMC delivered 'Pointing Software' will only be changed if there is a problem detected with the onboard software or hardware. On the other hand, it is expected that the ISOC do receive the 'occasional' update to the OMC catalogue. Updated versions of the catalogue are to be expected, as a minimum, following every AO cycle. Other updates are made available when it is deemed necessary by the OMC Instrument Team to incorporate new sources, or update the details of existing ones.

In line with RD.34, when a new copy of the OMC Catalogue, or Software, is ready the OMC Team send an email (delivery note) to the ISOC Librarian, specifying the server & location of the new delivery. The ISOC Librarian then copies the appropriate file(s) to the ISOC deliveries directory **/isoclib/deliveries/omc_dd_mm_yy** and inform the SCOM & ISOC CCB of its arrival.

The ISOC CCB procedure for the handling of a S/W deliver is slightly different from that of a new Catalogue. The reason for this being that the installation of a version of the OMC S/W is an internal ISOC concern, provided the ICD (RD.12) remains unchanged. The OMC catalogue is however an identified multi-site configured item. The updating of the OMC catalogue shall therefore be coordinated with the ISDC, via the GS CCB (see RD.34) and in line with AD.7. The ISOC librarian should send a copy of the catalogue, to ISDC, after its installation has been approval by the CCB.

5.5.1.3.1 Procedure for transferring OMC Catalogue to ISDC

1) The ISOC Librarian shall place a **'gzipped'** copy of the OMC Catalogue on the ISOC ftp server in the following directory:
   ftp://astro.esa.int/pub/integral/ISOC/download
2) The ISOC Librarian shall then send an email to the ISDC using the email address:
   isdc-ops@obs.unige.ch with copy to isdc-shift@obs.unige.ch
3) The email should include, as an attachment a copy of the delivery note, received from OMC, along with the following details:
   - Catalogue Version Number
   - The server location (See above)
   - Planned implementation date, Revolution number etc.

Changes to the OMC Delta Catalogue are performed by the ISOC Science Team and are addressed in section 5.1.5.

5.5.2 ISOC System Administration

5.5.2.1 Starting & Stopping of the PHS Receiver Task

For the duration of an AO Call the PHS Receiver Task must be up & running if proposers are to be able to submit a proposal. Just prior to the start of each AO the SCOM must request/authorise the System Administrator to START this task. Similarly at the end of an AO Call the SCOM will request the System Administrator to STOP this Task.

Requests to start & stop the task can also be made, out side of the AO periods, for the odd occasion that a proposer has been authorised to re-submit a proposal.

For details of how this should be done, the reader should ref to the ISOC Uplink SUM (RD.26).

5.5.2.2 Status Check of the External Interface Machine

External Communications Machine (ECM) - status to be checked (**daily**) by the ISOC Librarian.

At regular intervals during each day the "processCheckMonitor" task sends an email report, containing any message/alerts, to the Software Maintenance Team using the alias isocsmm@astro.esa.int.

The tasks checked on the ECM are:

- PRV - Proposal Receiver
- MLR – Mailer
- IFTS – ISOC-ISDC-MOC File transfer

If any of the tasks indicate a problem, or the emails are no longer being received, the ISOC Librarian will log the occurrence of the error and initiate an investigation/recover.

Full details & the applicable procedures can be found in the ISOC Uplink SUM (RD.26).

5.5.2.3 Status Check of the Operational Server

On a daily basis, normal working days only, the ISOC Librarian is required to perform a detailed check on the status of the critical S/W tasks running on the operational server (ISOCOPSV1).

When the problem is identified, the ISOC Librarian will record its details in the Log Book and conduct an investigation. This entry should contain details of any work-around implemented and where applicable the number of the SPR raised.

1) **LOGIN** to **ISOCOPWS1**.
2) Using the UNIX commad "ps' confirm:
   a) Process "pld" is running
   b) Process "ppd" is running
3) Examine the "/isoc/data/Submitted_Proposals" directory tree for anomalies.
4) Check the following log for errors:
   a) "pld" log
   b) "ppd" log

5) Run "ccs' noting any changes
6) Run "phs' noting any changes

5.5.2.4 Monitoring of Operational Server

During the period of an AO Call, the System administrator is required to check the status of the Push – Pull Daemon and Proposal Loader tasks running on the operational server (ISOCOPSV1).

1. Logon on to **ISOCOPWS1**.

If the "processCheckMonitor" task is not already running in a window, a terminal should be created. Clicking the right mouse button anywhere on the desktop and selecting the option Terminal does this. At terminal window command line type the following:

~checker/bin/processCheckMonitor

2. **Check for Error Messages**

If there is a problem with any of the tasks an error entry similar to the one below show be present in the window.

"ERR:process [*name_of_process*] not running, please take action"

3. **Record & Report any Problems/Errors**

Check the Operational Logbook, kept next to the machine, to determine if this is a new or old entry. (Each entry in the "processCheckMonitor" task has a unique time stamp.)
If this is a new entry, record the detection of it in the Logbook and contact Software Support, via email (isocsmm@rssd.esa.int) and phone, advising them that an error has been detected.

When the problem has been solved/rectified, the action taken should also be recorded in the Logbook. This entry should contain details of any work-around and where applicable the number of the SPR raised.

5.6 Instrument Mode & Event Designator Management

5.6.1 Installation of the new Event Designators

The installation of the new EDs requires that the users have access to several restricted CCS functions. The following steps assume that the ISOC Librarian has received a new ED Browser from MOC and place in the ISOC deliveries directory. Refer to section 5.5.1.2.

5.6.1.1 Copy ED Browser to a CD-ROM or some other Media device

A copy of the new MS Access "ED browser" database needs to be copied to the PC in the OPS room, in order for the appropriate data to be extracted.

This can be done in several ways but perhaps one of the easiest is to burn a copy of the browser onto a CD-ROM. An alternative method is via memory stick. This procedure assumes the use of a CD-ROM[19] and familiarity with the K3b CD burning programme available on the Linux server.

1. Log on to Development server (actual Workstation)
2. Insert blank CD in to the CD Writer
3. Open the K3b CD copying programme
4. If necessary the software will guide you through the steps to format the blank CD.
5. Select the "~isoclib\deliveries\" directory.
6. Locate and select/highlight the new version of the ED Browser:
   Event Designator_2K_dd_mm_yy.zip and/or Event Designator.mdb
7. Select the option/icon "Burn"
8. When the burning process is complete the CD will be ejected.

5.6.1.2 Install ED Browser on OPS PC & Extraction Files for CCS

This section & subsections can only be performed on the OPS room PC as they require the user to run MS Access.

5.6.1.2.1 Install a Copy of the New ED Browser on the OPS Room PC

1) Log on to the Ops PC as ***"phsuser1"*** and delete ALL '*.txt' files that you find in the local directory: "C**:\isoc\data\IODB\"**
2) Insert the CD ROM, containing the new ED Browser, in the CD drive and copy the file "**Event Designator_2K_dd_mm_yy.zip"** or "**Event Designator_2K_dd_mm_yy.mdb**" file to the directory "**C:\isoc\data\IODB**\"
3) If the CD contains the zipped version of the file the MS Access database (.mdb) files should be extracted from it. The ".mdb" should be placed in the directory ***{C:*\isoc\data\IODB*}.*** The extracted MS Access file, should be called:
   Event Designator_2K_dd_mm_yy.mdb

5.6.1.2.2 Extract ED Characteristics from the ED Browser

1) Open the ED Browser/Database, by double clicking on:
   Event Designator_2K_dd_mm_yy.mdb

[19] Blank CD-ROMs are available from SD Software support.

2) Verify that the IODB version, reference on the ED Browser/Viewer start-up screen/window, is in agreement with the release note sent by MOC.

   The file naming convention is: **IODB_XX_vvvv_dd_mm_yy**

```
Where:
      IODB     = Database name
      xx       = Relevant SDB version number
      vvvv     = IODB  running  version  number
                 (Increments with each IMCS propagation)
      dd_mm_yy = Release date
```

3) Export the files required by CCS
   - Set the Import/Export directory path to: "**C:\isoc\data\IODB**"
   - Select the Option "Export Database" & confirm Export.

4) When 'Job Complete' is indicated, confirm that the following 14 (.txt) files have been inserted in the directory "**C:\isoc\data\IODB** ":
   - cca; ccf; ccs; cdf; cpc; csf; csp; css; paf; pas; prf; prv; sdf; vdf

5.6.1.3 Copy files from PC to ISOCOPSV1

The extracted files should now be copied (via FTP) to the directory **"isocopsv1/isoc/data/IODB/",** on the operational server.

- Open the FTP connection to the OPS server, by double clicking the desktop icon "**isocopsv1**", and select the directory:
  /isocopsv1/isoc/data/IODB/
- Ensure that the transfer mode is either set to "**ASCII**"
- Open the local PC directory (**C:\isoc\data\IODB**) which contains the extracted ".txt" files, by double clicking the desktop icon "**Shortcut to IODB**".
- Select the ".txt" files and drag them to the "**/isocopsv1/isoc/data/IODB/"** directory.
- Confirm that all files have been copied over correctly:
  - cca; ccf; ccs; cdf; cpc; csf; csp; css; paf; pas; prf; prv; sdf; vdf
- Close down the ftp connection & log off of the PC

5.6.1.4 Extract & Compare ED information from the new IODB Files

1) Start the PHS application and select the CCS option "**Import IODB**"
2) If a completely new ED is to be imported/added it will be necessary for the user to add it to the list of EDs to be EXTRACTED. This is done by adding the mnemonic[20] of the new ED to the list displayed on the left, of the CCS Start-up screen. This list identifies all mnemonics / EDs already 'used' by the CCS/PHS.

(***The addition of any new EDs must be carried out before the 'extract' process is performed.)***

Remember to COMMIT the update!

3) Select the "**Extract IODB**" button and then wait while CCS processes the files. When instructed to do so you may "**DISMISS**" the processing window.
4) Select the various options "**ED Differences**; **Parameter Alias Differences; Parameter Differences; Affected Observations & Range Differences** " to view print any differences detected. Differences due to calibration curves of the JEMX Data Taking parameters will always be detected. These 'differences can be removed by following the procedures in section 5.6.1.5.

Note: If differences were detected, which would impact an observation the button to "**Import IODB**" will be inhibited.

5.6.1.5 JEMX Event Designator "Modifications/Fixes"

The ISOC do not use the calibration curves & parameter limits present in some of the JEMX EDs, provided by MOC. Every time an IODB/ED Browser extract is imported into the ISOC system PHS compares the 'new' (MOC Values) with those used by ISOC. Table 19 - List of expected JEMX related ED differences, provides details of the known/expected JEMX related discrepancies which will be flagged. Before the importing of the latest/extracted ED set can be carried out it is necessary to remove the discrepancies. This is dome by modifying the new "extracted" JEMX ED characteristics to reflect the values used by the ISOC. Refer to Table 20.

1) Within the Import IODB option of CCS there is a button/option called "**Fix Jemx**". By clicking this button CCS will run a script, which will update the new JEMX EDs to match the setting given in Table 20.

2) After the updates have been made (& committed) the button "**Refresh Diffs**" should be pressed. Ideally this should confirm that all the necessary JEMX changes have been implemented. Unfortunately the newly implemented JEMX HV activation EDs, contain within them the same commands/parameters of the Data Taking ED. Pending implementation of the appropriate Software Change Request the KE & LEACT_ EDs will not be updated by the JEMX Fix Button.

[20] The need to add any new EDs to the system would have been discussed & agreed with MOC well in advance of the new delivery. The name of the new EDs mnemonic should have been provided by MOC. It should have the form XXXXXXNN, where NN is the version number. The version number is never entered into the ISOC's list of "EDs to be imported", as the CCS will always check which version of an ED are available and extract ONLY the highest numbered version.

3) *If CCS flags no more differences proceed to section 5.6.1.6, otherwise proceed to section 5.6.2.*

List of expected JEMX related ED differences			
What	**ED Name**	**Param.ID**	**Change Description**
Changed	KEDATA	K0022F	VTYPE R -> E CATEG; N -> C
Changed	KEDATA	K0023F	VTYPE R -> E CATEG; N -> C
Changed	LEDATA	L0022F	VTYPE R -> E CATEG; N -> C
Changed	LEDATA	L0023F	VTYPE R -> E CATEG; N -> C
Changed	KEACT_	K0022F	VTYPE R -> E CATEG; N -> C
Changed	KEACT_	K0023F	VTYPE R -> E CATEG; N -> C
Changed	LEACT_	L0022F	VTYPE R -> E CATEG; N -> C
Changed	LEACT_	L0023F	VTYPE R -> E CATEG; N -> C

Table 19 - List of expected JEMX related ED differences

ED Name	FPNAME	Change to make
KEDATA	K0022F	Open VTYPE & change value from E to R Open CATEG & change value from C to N
		Open **PRF_ID 3886** and change the entry which has: PRV_MINVAL from 3.125 to 0 PRV_MAXVAL from 93.75 to 29
	K0023F	Open VTYPE & change value from E to R Open CATEG & change value from C to N
		Open **PRF_ID 3887** and change the entry which has: PRV_MINVAL from 6.25 to 1 PRV_MAXVAL from 96.875 to 30
LEDATA	L0022F	Open VTYPE & change value from E to R Open CATEG & change value from C to N
		Open **PRF_ID 4046** and change the entry which has: PRV_MINVAL from 3.125 to 0 PRV_MAXVAL from 93.75 to 29
	L0023F	Open VTYPE & change value from E to R Open CATEG & change value from C to N
		Open **PRF_ID 4047** and change the entry which has: PRV_MINVAL from 6.25 to 1 PRV_MAXVAL from 96.875 to 30
KEACT_[21] & LEACT_	K/L0001FA	Open VTYPE & change value from E to R Open CATEG & change value from C to N
	K/L0001FB	Open VTYPE & change value from E to R Open CATEG & change value from C to N

Table 20 - List of necessary JEMX ED Updates

[21] The KE/ LEDATA & KE/LEACT_ Event Designators each use the same PRF_ID the updating of the KEDATA & KEACT_ values for the PRF_ID also update the values for LEDATA & LEACT_.

5.6.1.6 Import new version of IODB/Event Designators

Note: The final installation of the new version of the IODB / EDs needs to be approved by the ISOC CCB.

1) Select the "**Refresh Diffs**" button and verify that all discrepancies are have gone.
2) Select the Options "**ED Differences**; **Parameter Differences**; **Parameter Alias Differences & Affected Observations**" and verify that there are now 'problems remaining.
3) Select the "**Import IODB"** button and CCS will initiate the final stages of the import process. *This will take several minutes*.
4) When import is complete exit by selecting "**Dismiss**"

Approximately 10 minutes after the installation of the new set of EDs it will be possible to verify that the IODB version number, in PHS.

5) Select 'Help/About' option on the PHS Switchboard and verify that the CCS-IODB Version number has been updated to agree with the latest MOC IODB. The format should look like something like

IODB_XX_vvvv_dd/mm/yy SIGNATURE dd_mm_yy_A

```
Where:
IODB_xx_vvvv_dd/mm/yy    - reflects the version of IODB imported &
SIGNATURE dd_mm_yy_A     - specifies the date at when PHS/CCS was updated.
```

6) Update the ISOC Log Book noting the ISOC system on which the update was carried out and the IODB version number as recorded/displayed by PHS.

7) If an ED was imported which contained a new ED parameter it will be necessary to define for that ED / parameter a set of ISOC default values. Refer to section 5.6.3.3.

8) In a new ED, or a new version of an ED with a new parameter within it, has been imported it essential that a set of ISOC default values is defined, before it can be used. It will also require linking of a new ED to a mode.. Refer to section 5.6.2.

9) That's it! The new Event Designators are now installed. You should now logout of PHS & record time, date & version number of new IODB in the Log Book

5.6.2 Mode & ED Definition & (Re-) configuration

The CCS allows, an authorised, ISOC user the capability of examining and modifying EDs already contained within the ISOC PHS.

This procedure address the following CCS Functionality's:

1. Maintain at ED level certain information
2. Maintain a list/set of Modes
   a) Maintain Mode Level Parameters
   b) Maintain Links between Mode & EDs
   (Allow sorting by either EDs or Modes)

By manipulation of EDs it is possible to change completely the characteristics of an observation. It is essential therefore that any updates that are to perform have the full approval of the ISOC CCB, and when appropriate (e.g. ED Timing) in consultation with MOC.

5.6.2.1 Maintenance of ED level information

The CCS option "**Current EDs**" allows the user to view, sort and modify the characteristics of all EDs installed on the PHS/CCS

The following characteristics are displayed can be changed on the opening window:

- Next ED Offset

By selecting a specific ED the ED characteristics can be set/changed by selecting "ED Parameters. The following parameters can be changed, in the pop-up window:

- ISOC Parameter Default Values
- ISOC Parameter Acronyms

Note:
The 'Next ED Offset' and the 'ISOC Parameter Acronym' must be entered for each ED. The Acronym is the parameter description displayed in PHS. An 'ISOC Parameter Default Value' must be entered if no MOC Default has been specified.

5.6.2.2 Maintenance of ISOC 'Instrument' Modes

The CCS option "**Mode Maintenance**" allows the user to build and maintain the list of 'ISOC supported Modes'. In order to do this option allows the user to create new modes and associated EDs with that mode. It is also possible for the user to completely remove a mode from the system. This option of CCs consists to two sub options:

1) At mode level the user must define/ can change the following:
   - ISOC Mode Description (Should use UPPER CASE)
   - Mode Start Offset (wrt PREQ)
   - TM Allocation Default/Min/Max
   - Minimum Exposure Time
   - ISDC KEY (The applicable 'mode number' as assigned/defined in RD.11.)

2) In order to assign an ED to a mode the user need only select the required ED from the list provided. The user can also change the order by which the EDs shall schedules when the mode is called/executed by OSS.
3) When a new ED, with observation specific parameters, is added to an already exiting **& USED** mode, it is necessary to deselect/select that mode (@observation level) before the new parameters can be seen/modified in an observation.

5.6.2.3 Maintenance of other ED Relationships

It should be noted that the ED Import & Maintenance functionality's of CCS only work on ED related information stored within PHS. It is possible for EDs to change, which may impact not only PHS but also OSS & PGT configuration scripts &/or code. If this happens it is necessary for the person responsible for the importing of the EDs to raise the necessary subsystem SPRs. The known subsystems & corresponding EDs where this is necessary are given in Table 21.

Sub-system	ED related info
OSS	- timing (& content) associated with updating the BCP (wrt Slews) - timing of the sending of the PST ED - Timing & content of OMC (IM_A & IM_B) EDs
PGT	- All mode definitions and ALL associated ED parameters

Table 21 - ED used, in PGT & OSS, whose characteristics are not taken from CCS

5.6.3 Investigation into Problems with IODB/EDs!

This section should only be followed if differences were detected during the importation process, other than those identified in section 5.6.1.5.

- Select the various options "**ED Differences**; **Parameter Alias Differences; Parameter Differences; Affected Observations & Range Differences** " and print any differences detected.

5.6.3.1 New EDs in the ED Difference window

The only new EDs which should appear in this window should be those added to the list of EDs to be extracted. New EDs can always be imported into PHS/CCS, without concern, as they are not associated with any ISOC Mode/Observation.

After the import process is complete the user should enter the required ISOC characteristics which are to be associated with it. See section 5.6.2.1.

5.6.3.2 ED has been deleted

The deletion of an ED, by MOC, is not expected to take place. Should this however happen the removal of an ED form the IODB will, on import, also remove the ED from CCS. Provided that is that the ED is not identified as being used in any observations. In order to avoid any inconsistencies it is recommended that MOC should never delete/remove an ED from the system. If necessary a new one should be made.

5.6.3.3 Parameters Added/Deleted to/from an ED

Adding a parameter to an ED is not a problem for CCS/PHS. Once the import is complete the ISOC CCS user must enter the ISOC characteristics of the new ED parameter. This is can be done by using CCS option 'Current EDs'.

5.6.3.3.1 Impact on existing Observations

What to do in this event is not a simple thing to define a procedure. If CCS indicates that any existing observations are impacted the differences should be printed, along with a list of the impacted observations and discussed offline with the ISOC Science Team.

5.6.3.3.2 Impact on PGT

Any change to an ED involving parameters may impact PGT. Changes to be looked for are:

- Number of ISOC selectable parameters
- Parameter range
- Parameter alias
- Parameter name

5.6.3.4 Timing (Execution duration) of an ED has changed

In principle, a change in the duration of an ED should be managed, by OSS, without any problem. Unfortunately, no (or limited) test has been carried out to verify OSS will correctly handle such a change. It is not expect that there would be a problem if the duration were to be decreased. If the duration of an ED were to be increased, it has to be confirmed whether OSS correctly delays, if necessary, the execution of the OTF Mask/unmask ED. See section 5.6.2.3

5.6.3.5 ED Controlled by OSS have been changed

5.6.3.5.1 OMC IM_A & IM_B have been highlighted

Refer to section 5.6.2.3

5.6.3.5.2 Broadcast Packet Mask/Unmask

Refer to section 5.6.2.3

5.6.3.6 Final Importation of new Event Designators

If the problems with the new IODB required that the previous import attempt be aborted the import procedure should be repeated from section 5.6.1.4. If a new or modified ED Browser has been delivered, the procedure will have to be repeated from the beginning.

5.6.4 JEMX Specific Event Designator Activities

5.6.4.1 Procedure to Update the Default JEM X1 & 2 HV settings

Following the reception of an update request, from the JEMX PI, the ISOC responsible should raise the required GS CR (Ref. RD.34) and the associated ISOC SCREW (Configured Item).

Once the GS CR & SCREW have been raised the ISOC responsible should discuss with the PI and the MOC & ISOC planners a convenient time /revolution at which to implement the update[22].

Once the update has been approved by the GS & ISOC CCBs the ISOC responsible should implement the following procedure to update the ISOC DB.

By convention the difference between the initial & final HV, for a given JEMX unit should always be THREE LSB.

1) Logon to PHS and select the CCS option "Current EDs"
2) For JEM X1
   a) Select the row with ED Name = "KEACT_"
   b) Click the button "ED Parameters", to view the contents of the ED.
   c) Set the initial HV setting by double clicking the "ISOC Default" value for parameter K0001FA, and then enter the new value. (Press Enter to save update.)
   d) Set the Final HV setting by double clicking the "ISOC Default" value for parameter K0001FB, and then enter the new value. (Press Enter to save update.)

3) For JEM X2
   a) Select the row with ED Name = "LEACT_"
   b) Click the button "ED Parameters", to view the contents of the ED.
   c) Set the initial HV setting by double clicking the "ISOC Default" value for parameter L0001FA, and then enter the new value. (Press Enter to save update.)
   d) Set the Final HV setting by double clicking the "ISOC Default" value for parameter L0001FB, and then enter the new value. (Press Enter to save update.)

4) Click "COMMIT" to save updates
5) Click "PRINT" (& highlight "Selection" option) and print a copy of the updates
6) Click "DISNISS" to close the window
7) Click "DISMISS" to close the "Maintain Current EDs" window
8) Close PHS

Following the implementation of the updates the ISOC planners should regenerate ALL future schedules and check the ICPs, to ensure that the correct HV activation settings are present. If the settings are correct, the planner should then forward the regenerated planning files to MOC & ISDC.

[22] The actual update does not require ISOC to perform any special re-planning. It is however be necessary/desirable that all future planning files be regenerate after the update has taken place.

The ISOC responsible should now log all updates/activities and then inform the PI, MOC & GS CCB that the requested updates have been implemented.

5.6.4.2 Switch the Operational JEMX unit

At the request of the JEMX PI, the ISOC, normally schedule observations using only one JEMX unit. The, not to be used, JEMX is always kept in SAFE_DORM mode. The one being used being normally in Data Taking mode. The SAFE_DORM mode has no EDs associated with it.

If it is required to switch the operational baseline JEMX unit, the following steps should be taken:

1. Modify CCS "Domain Properties" (see Table 22) to reflect which JEMX is to be used in the generation of GPS/GCDE proposals/observation.

Domain Properties	If using JEMX-1	If using JEMX-2	Both[23]
gps.jemx1.mode	"DATA_TAKING"	"SAFE_DORM"	"DATA_TAKING"
gps.jemx2.mode	"SAFE_DORM"	"DATA_TAKING"	"DATA_TAKING"
gcde.jemx1.mode	"DATA_TAKING"	"SAFE_DORM"	"DATA_TAKING"
gcde.jemx2.mode	"SAFE_DORM"	"DATA_TAKING"	"DATA_TAKING"

Table 22 - CCS Domain Properties optimised for JEMX 1 or 2

2. If both JEMX units are to be used, it may be necessary to adjust the default TM allocation to match the approved (combined JEMX) allocation. This can be done using the CCS option "Mode Maintenance". The present ISOC defaults are given in Table 23. The combined max TM allocation is nit given here as it is subject to change.

Mode	JEMX 1			JEMX 2		
	Def.TM	Min.TM	Max.TM	Def.TM	Min.TM	Max.TM
NOT_USED	1	1	124	1	1	124
SETUP	8	1	124	8	1	124
DATA_TAKING	8	1	124	8	1	124
DIAG_DUMP	8	1	124	8	1	124
SAFE_DORM	1	1	124	1	1	124

Table 23 - JEMX 1 & 2 TM Allocation (ISOC CCS defaults)

3. ALL observations, (Normal Calibration, GPS & GCDE) which have only been partially scheduled, need to be closed down (set to "Completed") and new observations created, to cover the remaining time, & "Approved".
4. Before proceeding it must be confirmed that no 'scheduled/partially scheduled observations remain in the database.
5. ISOC need to run the "swapjemx" script[24] to update ALL "Approved Observations" and set the JEMX1 modes & TM parameters to those of JEMX2. In all Approved observations JEMX 2 mode should then be set to "SAFE_DORM". The TM allocation should always be set to "Default".

[23] If both JEMX units are to be used, it may be necessary to adjust the default TM allocation (see Table 23) to match the approved (combined) allocation.
[24] This script is located in the directory: isoc/software/master/db_v4.x.x/alter/

5.6.4.2.1 Disable JEMX HV Activation EDs @ Belt Exit.

In an observation, the ISOC can schedule neither, either or both JEMX units. When generating the output files, for a specific revolution OSS checks whether a JEMX unit is used in Data-Taking Mode, at any time in that revolution. If OSS detects that a unit is used in Data-Taking mode it will automatically inserts the appropriate HV activation EDs, at/close to belt exit. The ED to be inserted is identified in the CCS Domain Properties table. The CCS parameters & JEMX EDs used in the "CCS Domain Properties" table are:

instrumentStartup.J.ed = "KEACT_"
instrumentStartup.K.ed = "LEACT_"

Should it be desirable, to ensure that no JEMX activation ED can be scheduled, even when the Data Taking Mode has been selected, one can either edit the POS & ICP to remove the ED (post scheduling) or set the appropriate CCS parameter "instrumentStartup...." value to "**NONE**".

Editing the POS/ICP is the preferred & best when the suppression of the activation is only required for a couple of revolutions. The CCS capability, of suppressing the insertion of these activation EDs, was implemented to enable the ISOC to avoid systematically scheduling the instrument activations should it be requested by MOC &/or the JEMX PI.

6. External Interfaces

6.1 Mission Operations Centre

Refer to the Integral Flight Operations Plan Volume 2, Book 1 & Volume 3 Book 1 (AD.6).

6.2 Integral Science Data Centre

Refer to the ISOC-ISDC Interactions Document (AD.7) and the ISOC-ISDC ICD (RD.11).

6.3 Southampton University

The ISOC will interface with Southampton University in connect with the maintenance of the Mass Model, Observation Time Estimator (OTE) and the Instrument Parameter Validator (IPV).

6.4 Instrument Teams

With the exception of OMC, for the deliver or the OMC Pointing S/W and the OMC catalogue, the interactions to the four instrument teams will normally be managed via meetings of the IGSCCB, ISWT and IT status/consortia. Additional interactions are expected to take place via ISOC participation in the regular ISDC – Instrument Team meetings and the proposed IGS Co-ordination meetings. RD.24 contains details of all deliveries & associated interactions between the ISOC and the instrument teams.

The ISOC – OMC interface is also addressed in RD.12.

6.5 The Science Community

This interface is handled via the implementation of the Integral/ISOC Web based (http://www.rssd.esa.int/Integral/isoc/html/) Help Desk. Refer to section 4.2.1.

7. Annexes:

7.1 New Source Naming Convention

Refer to the AO Documentation at http://www.rssd.esa.int/Integral/isoc/html/

7.2 Data Release Guidelines

Refer to RD. 21

7.3 Project Scientist Guidelines for ISOC Mission Planning

Refer to RD. 31

7.4 Baseline IBIS Configurations for use with different TM Allocations

Unless requested/agreed otherwise, with the IBIS PI and MOC, the ISOC should always use one of the following[25] IBIS configurations. (Refer to Table 24, Table 25 and Table 26.)

For Normal Observations (nominal TM allocation for IBIS = 134 pkt)							
Param	**Raw or Engineering**		**TC**	**NP**	**ISOC Default**	**Units**	**Comments**
G8609	R		G0813	1	**1750**	sec	Spectral Imaging Histograms (S6 & S7) Integration Time
G8601	R		G0804	1	**2000**	KeV	ISGRI Energy Upper Threshold
G8819	E	[raw=1]	G0836	20	**1.95**	msec	Spectral Timing Histograms (S8) Integration Time
G8829	E	[raw=2]	"		**100**	KeV	PPM - PICSIT Energy Lower Threshold
G8830	E	[raw=196]	"		**10192**	KeV	PPM - PICSIT Energy Upper Threshold
G8784	E	[raw=90]	G0803	1	**5625**	nsec	ISGRI Rise Time Upper Threshold
G8602	R		G0805	1	**0**	KeV	Compton Selection: Energy above which the selection is applied (for energy below no selection rule is applied)
G8867	R		G0885	1	**0.9455**	cos	Compton Selection: Cosine of the angle inside which an event is classified as Compton

Table 24 - IBIS Config. for Normal Observations/TM

For GPS and GCDE observations							
Param	**Raw or Engineering**		**TC**	**NP**	**ISOC Default**	**Units**	**Comments**
G8609	R		G0813	1	**1750**	sec	Spectral Imaging Histograms (S6 & S7) Integration Time
G8601	R		G0804	1	**2000**	KeV	ISGRI Energy Upper Threshold
G8819	E	[raw=1]	G0836	20	**1.95**	msec	Spectral Timing Histograms (S8) Integration Time
G8829	E	[raw=2]	"		**100**	KeV	PPM - PICSIT Energy Lower Threshold
G8830	E	[raw=196]	"		**10192**	KeV	PPM - PICSIT Energy Upper Threshold
G8784	E	[raw=90]	G0803	1	**5625**	nsec	ISGRI Rise Time Upper Threshold
G8602	R		G0805	1	**5000**	KeV	Compton Selection: Energy(10 packets less)
G8867	R		G0885	1	**0.9455**	cos	Compton Selection: Cosine of the angle inside which an event is classified as Compton

[25] Check whiteboard Ops Room for possible updated version of these tables

Table 25 - IBIS Config. for GPS & GCDE Observations

For observations with reduced TM allocation (90 pkt)							
Param	**Raw or Engineering**		**TC**	**NP**	**ISOC Default**	**Units**	**Comments**
G8609	R		G0813	1	**1750**	sec	Spectral Imaging Histograms (S6 & S7) Integration Time
G8601	R		G0804	1	**2000**	KeV	ISGRI Energy Upper Threshold
G8819	E	**[raw=6]**	G0836	20	**62.5**	msec	Spectral Timing Histograms (S8) Integration Time (20 packets less)
G8829	E	[raw=2]	"		**100**	KeV	PPM - PICSIT Energy Lower Threshold
G8830	E	[raw=196]	"		**10192**	KeV	PPM - PICSIT Energy Upper Threshold
G8784	E	**[raw=75]**	G0803	1	**4687.5**	nsec	ISGRI Rise Time Upper Threshold (5 packets less)
G8602	R		G0805	1	**5000**	KeV	Compton Selection: Energy (10 packets less)
G8867	R		G0885	1	**0.9455**	cos	Compton Selection: Cosine of the angle inside which an event is classified as Compton

Table 26 - IBIS Config. for Reduced TM Allocation

7.5 OMC FFC/DCC list of preferred Attitudes

In support of the OMC FFC/DCC, the OMC team have specified a 'preferred' set of attitudes. When an OMC FFC/DCC is schedule, the attitude used (pointing number) should be contained in the Proposal title. The list[26] of preferred attitudes is given in Table 27.

List of OMC FFC pointings[27]
(Valid from 25 April 2003)

Nr.	RA	DEC	L_ecl	B_ecl	L_gal	B_gal	Prior	Comment
1	44.4	-16.5	36.26	-31.83	199.49	-58.96	1	
2	10.8	-34.8	353.93	-35.79	315.37	-82.13	2	
3	178.5	28.4	166.55	25.29	203.88	77.24	3	
4	195.3	6.8	191.41	12.29	309.88	69.54	4	
5	15.6	-15.8	7.93	-20.65	136.14	-78.39	5	
6	186.1	45.0	163.20	42.74	138.00	71.33	6	
7	167.2	-7.4	171.16	-11.86	263.50	47.46	7	
8	357.0	14.5	3.14	14.47	100.70	-45.62	8	
~~9~~	148.0	17.1	144.34	3.92	216.94	47.48	9	no longer used
10	227.8	14.5	220.66	30.99	18.85	55.13	10	
~~11~~	36.9	16.3	39.84	1.62	153.98	-40.70	11	no longer used
12	258.2	-6.4	257.76	16.53	15.23	18.55	12	
~~13~~	252.9	-14.4	253.28	8.05	5.16	18.49	13	no longer used
14	219.2	34.4	201.65	46.53	57.27	66.31	14	
15	33.9	-36.4	14.75	-46.30	245.64	-69.91	15	
16	169.6	73.5	123.11	59.24	131.61	42.02	16	
17	2.6	-57.7	329.54	-51.74	313.45	-58.58	17	
18	198.1	-27.9	207.54	-18.67	308.57	34.74	18	
19	211.8	58.1	169.64	62.83	104.92	56.30	19	
20	329.5	-51.3	311.85	-36.15	344.31	-49.50	20	
21	52.1	-54.2	15.69	-68.08	267.24	-50.63	21	
~~22~~	300.5	-22.6	297.96	-2.08	19.23	-25.10	22	no longer used
23	62.5	-68.6	336.49	-79.41	281.84	-39.41	23	
24	75.0	-45.5	61.74	-67.47	251.00	-38.08	24	
25	121.0	41.9	114.25	21.04	178.29	30.71	25	
26	162.8	-24.2	174.46	-28.91	270.70	31.04	26	
27	256.3	50.8	239.61	72.79	77.70	37.22	27	
28	106.4	-75.2	245.69	-79.91	286.55	-25.27	28	
29	251.1	72.2	131.16	81.35	104.37	35.26	29	
30	289.8	61.9	340.72	80.27	92.97	20.58	30	

Table 27 - List of Preferred OMC FFC pointings

[26] Check whiteboard Ops Room for possible updated version of this list.
[27] to avoid contamination by planets pointings 9, 11, 13 & 22 are no longer used